


Manufacturer: Quick Bauprodukte GmbH
Test requirements: Test instruction fibre concrete "Norwegian Standard"
Material / Mixture-No.: Quick fiber concrete M1
Article / Article-No.: Dreika 60/30 K1 D1 SN
Concrete cover: 60 mm
Production date: 23.01.2014
Test period: 21.-24.02.2014

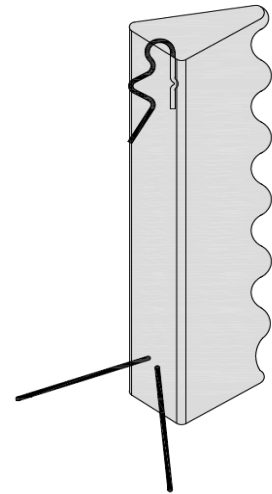

Results dimension test

Part No.	Height
1	61,00
2	61,00
3	62,00
mean	61,33

Results water absorption test

Part No.	Storage weight in g after 48 hours heat treatment curing at +105°C	Weight in g after 30 min. immersion	Water content in % after 30 min. (to be < 5 %)	Weight in g after 24 hours immersion	Water content in % after 24 hours (to be < 8,5 %)
1	971	998	2,80%	1017	4,80%
2	967	995	2,90%	1012	4,60%
3	968	996	2,90%	1014	4,80%
mean			2,87%		4,73%

Results breaking load test

Part No.	breaking load F / kN (to be >6 kN)
1	7,70
2	7,20
3	9,20
mean	8,03

This certificate complies to the requirements of DIN / EN 10204:2005-01-3.1

The buyer is not released from any entry control.
It is also irrelevant in case of incorrect use or handling.