


**Manufacturer:** Quick Bauprodukte GmbH  
**Test requirements:** Test instruction fibre concrete "Norwegian Standard"  
**Material / Mixture-No.:** Quick fiber concrete M1  
**Article / Article-No.:** Dreika 40/30 K1 D1 SN  
**Concrete cover:** 40 mm  
**Production date:** 16.01.2015  
**Test period:** 18.-20.02.2015

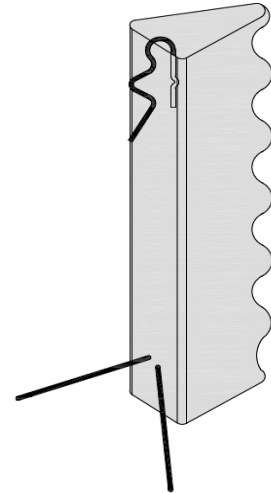

**Results dimension test**

Part No.	Height
1	40,00
2	40,00
3	41,00
<b>mean</b>	<b>40,33</b>

**Results water absorption test**

Part No.	Storage weight in g after 48 hours heat treatment curing at +105°C	Weight in g after 30 min. immersion	Water content in % after 30 min. (to be < 5 %)	Weight in g after 24 hours immersion	Water content in % after 24 hours (to be < 8,5 %)
1	702	733	4,40%	742	5,60%
2	703	737	4,80%	741	5,40%
3	711	740	4,10%	748	5,20%
<b>mean</b>			<b>4,43%</b>		<b>5,40%</b>

**Results breaking load test**

Part No.	breaking load F / kN (to be >6 kN)
1	7,50
2	8,20
3	7,90
<b>mean</b>	<b>7,87</b>

This certificate complies to the requirements of DIN / EN 10204:2005-01-3.1

The buyer is not released from any entry control.  
 It is also irrelevant in case of incorrect use or handling.