

Panasonic



NEW 4 WAY 60X60 CASSETTE

- Easy to combine with standard 60x60 ceiling grid
- **New** refrigerant R32
- High energy savings A+
- Quiet operation from only 23dB(A)
- Drain pump included
- Easy to install: Flexible piping length and compact outdoor
- Can reuse old piping
- Weekly timer wired control
- Smartphone control (Optional)
- Connectivity by KNX, Modbus and Bacnet (optional)



Our heat pumps containing the refrigerant R32 show a drastic reduction in the value of Global Warming Potential (GWP).



Seasonal efficiency in cooling will bring you saving all year while heating. Energy efficiency rank from A+++ to D.



Seasonal efficiency in heating will bring you saving all year while heating. Energy efficiency rank from A+++ to D.



Inverter range provides more precise temperature control and keeps the temperature constant with lower energy consumption and a reduction in noise.



Panasonic R2 Rotary Compressor. Designed to withstand extreme conditions, it delivers high performance and efficiency.



With Super Quiet technology our devices are much more quiet than a library (30dB(A)).



Down to -10°C in cooling only mode. The air conditioner works in cooling only mode with an outdoor temperature of -10°C.



Down to -15°C in heating mode. The air conditioner works in heat pump mode with an outdoor temperature as low as -15°C.



The Panasonic renewal system allows good quality existing R410A or R22 pipe work to be re-used whilst installing new high efficiency R32 systems.



This unit is ready to connect to internet and be managed by smartphone, with a powerful and user friendly App to manage the comfort wherever you are.



Ready to be integrated and be managed by Panasonic centralized systems with CZ-CAPRA1



Communication port to integrate the unit to home and building management systems most known standards.

NEW 4 Way 60x60 Cassette

Specially designed for offices, retail and restaurant applications, Cassette fits perfectly into 60x60 ceiling grids. This compact Cassette performs high efficiency even at low temperatures. This can also be connected to KNX, Modbus, Bacnet interfaces for easy integration with your BMS systems. Interfaces have dry contacts (ON/OFF, error message) to enable easy integration.

Panasonic R2 Rotary Compressor

Panasonic Rotary Compressors for Room Air Conditioners have been installed in extremely demanding environments around the world. Designed to withstand extreme conditions, Panasonic Rotary delivers high performance, efficiency and reliable service, no matter where you are.




R32 Refrigerant Gas

Be ready for the future, the new generation of Panasonic heating and cooling systems are designed to optimize the operation with R32 refrigerant. The new R32 Refrigerant is more environmentally friendly than R410a widely used in the last years. R32 has also zero impact on the ozone layer and it has 75% less impact on global warming vs R410A.



Smartphone control and statistics

With the new accessory CZ-TACG1 control the comfort and the power consumption with your smartphone or tablet via internet. Offering even more functions as if you were at home or office: start/stop, mode operation, set temperature, room temperature, weekly timer, etc as well as the new, advanced functionality provided by Internet Control to achieve better comfort and helping to increase the efficiency. Connect the CZ-TACG1 accessory to the indoor unit and link wireless to your home internet router.

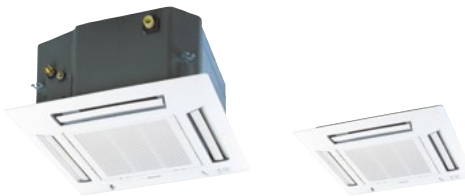

NEW CZ-BT20EW
RAL9010 panel
for 4 Way 60x60
Cassette



Included



CZ-TACG1 Panasonic
Wifi kit: Optional.

KIT			KIT-Z25-UB4	KIT-Z35-UB4	KIT-Z50-UB4	KIT-Z60-UB4
Cooling capacity	Nominal (Min - Max)	kW	2,50 (0,85 - 3,20)	3,50 (0,85 - 4,00)	5,00 (0,90 - 5,80)	6,00 (0,90 - 6,35)
SEER ¹⁾		W/W	6,30 A++	6,50 A++	6,40 A++	6,20 A++
Input power cooling	Nominal (Min - Max)	kW	0,55 (0,24 - 0,82)	0,90 (0,24 - 1,18)	1,54 (0,26 - 1,88)	2,05 (0,26 - 2,20)
Heating capacity	Nominal (Min - Max)	kW	3,20 (0,85 - 4,80)	4,50 (0,85 - 5,60)	5,60 (0,90 - 7,10)	7,00 (0,90 - 8,00)
Heating capacity at -7°C		kW	2,88	3,37	4,40	5,10
SCOP ¹⁾		W/W	4,30 A+	4,20 A+	4,30 A+	4,20 A+
Input power heating	Nominal (Min - Max)	kW	0,79 (0,23 - 1,32)	1,36 (0,23 - 1,75)	1,85 (0,26 - 2,41)	2,40 (0,26 - 2,75)
Sound pressure ²⁾	Cool (Hi / Lo / Q-Lo)	dB(A)	34 / 25 / 22	34 / 26 / 23	37 / 28 / 25	42 / 32 / 29
	Heat (Hi / Lo / Q-Lo)	dB(A)	35 / 28 / 25	35 / 28 / 25	38 / 29 / 26	43 / 32 / 29
Indoor unit Dimension (HxWxD) / Net weight	Indoor	mm / kg	260 x 575 x 575 / 18	260 x 575 x 575 / 18	260 x 575 x 575 / 18	260 x 575 x 575 / 18
	Panel	mm / kg	51 x 700 x 700 / 2,5	51 x 700 x 700 / 2,5	51 x 700 x 700 / 2,5	51 x 700 x 700 / 2,5
Outdoor unit Dimension ³⁾ / Net weight	H x W x D	mm / kg	542 x 780 x 289 / 33	619 x 824 x 299 / 35	695 x 875 x 320 / 43	695 x 875 x 320 / 43
Refrigerant (R32)		kg / TCO ₂ Eq.	0,88 / 0,594	0,93 / 0,628	1,13 / 0,763	1,13 / 0,763

Accessories

CZ-TACG1	NEW Panasonic Wifi kit for internet control
CZ-CAPRA1	RAC interface adapter for integration into P Link

Accessories

CZ-RD52CP	Wired remote controller for Floor Console and Cassette
------------------	--

1) Energy Label Scale from A+++ to D. 2) The sound pressure of the units shows the value measured of a position 1,5m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. Q-Lo: Quiet mode. Lo: The lowest fan speed. 3) Add 70mm for piping port.

Panasonic®

To find out how Panasonic cares for you, log on to www.aircon.panasonic.eu/IE_en/
+353 (0)1 4195313
+353 (0) 876005031

Heating & Cooling Solutions
Panasonic Ireland. A branch of Panasonic Marketing Europe GmbH Unit 1, The Courtyard,
Kilcubry Business Park Nangor Road, Dublin 22

heating & cooling solutions