

## Install Manual

# SD1-150-275



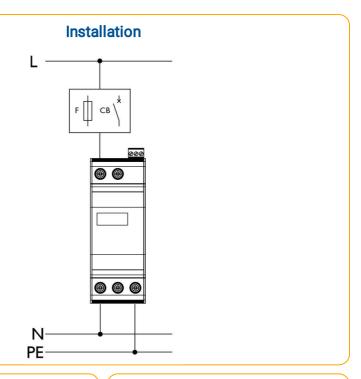


### **Alarm**

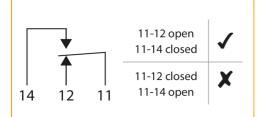

#### **Terminal Installation**

Terminal Type	,0	
min Capacity	2.5 mm <sup>2</sup>	0.5 mm <sup>2</sup>
max Capacity	16 mm <sup>2</sup>	2.5 mm <sup>2</sup>
Torque	2 Nm 🖤	0.6 Nm
Wire Striping Length	12mm	5mm

## **Mounting Information**



#### **Electrical Specifications**

Connection type	¥	Shunt
Modes of protection	'n	L-N
Number of ports		1
Location		Indoo
Short circuit withstand level	ISSCR	50kA
Maximum backup fuse	<b>=</b>	80A
Recommended SCB		SCB1-3-25
Earth leakage current	I <sub>PE</sub>	N/A

#### **Mechanical Specifications**

Minimum operating temperature	P	-40°C
Maximum operating temperature		70°C
Minimum operating humidity	<b>%</b>	5%
Maximum operating humidity	<b>@</b>	95%
Mounting method	Æ	TS35 DIN Rail
Environmental rating	ŵ	IP20

## **Optional Mounting Kit-M**



Wire entry holes should be cut by the installer on site to keep the wiring to the SD1 unit as short and straight as possible. Cable glands or grommets should be used to suit the environment and diameter of the wires utilised. Enclosure dimensions are shown in the product datasheet.

Generated Tue Sep 07 2021

Novaris