


# FACADE SCREW

## SELF DRILLING SCREW FOR FASTENING OF CLADDING TO WOOD



- #1 drill point for increased pull-out values
- Tall head for easy and stable mounting
- Surface treated with zinc for good corrosion resistance
- Supplied with washer for better load distribution and sealing abilities
- Available in more than 500 colours (QUALICOAT certified powder)



European Technical Assessment ETA-10/0021

Effective length

Hex head

Corrosion category C3


Hardened steel

### PRODUCT RANGE

MG/PG	Item no.	Item name	Washer [mm]	Thread [mm]	Length L [mm]	Effective length L <sub>ef</sub> [mm]	Drill capacity [mm]	Head [mm]	Unit [pcs]
06 2220	12340	HWH 4.8 X 28 #1 "A" HX8 ALU-14B	ALU Ø14	Ø4.8	28	19.0	2 x 0.5 - 2 x 1.0	Ø10.0 HEX 8.0	250
	10299	HWH 4.8 X 35 #1 "A" HX8 ALU-14B			35	26.0			
	12769	HWH 4.8 X 50 #1 "A" HX8 ALU-14B			50	41.0			100
	10303	HWH 4.8 X 60 #1 "A" HX8 ALU-14B			60	51.0			
	10027	HWH 4.8 X 80 #1 "A" HX8 ALU-14B			80	71.0			

### TYPICAL APPLICATION


- Fastening of cladding to wood

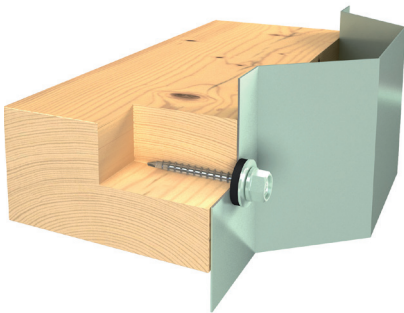

## INSTALLATION INSTRUCTIONS


For optimal performance it is important to follow the installation instructions. An incorrect installation may lead to decreased sealing abilities and/or load bearing capacity.

For optimal boreevne er det anbefalet, at omdrejningshastigheden er 1800 - 2500 RPM.

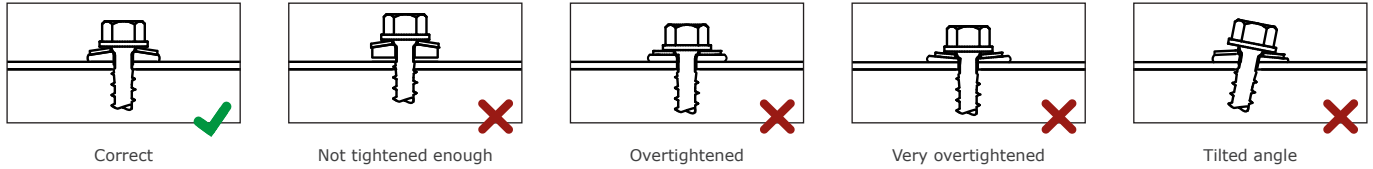

## TECHNICAL DATA

Outer diameter, D	[mm]	Ø4.8
Inner diameter, d	[mm]	Ø3.4
Head diameter, $d_k$	[mm]	Ø10.0
Washer diameter, $d_w$	[mm]	Ø14.0
Drill point diameter, $d_p$	[mm]	Ø2.9
Drill point length, $l_p$	[mm]	4.5
Pitch, P	[mm]	2.2
Drive type, R	[-]	HEX 8.0

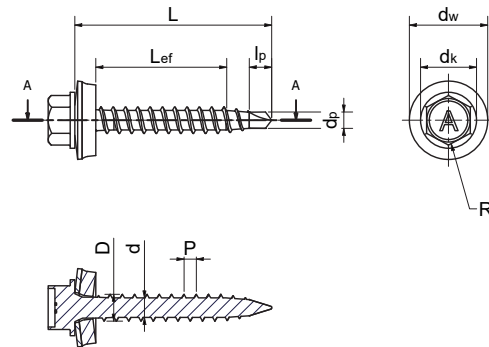

## DESIGN RESISTANCE

The design resistance of the screw is determined in accordance with european technical assessment ETA-10/0021 and EN 1995-1-1:2004 + AC:2006 + A1:2008 + A2:2014, Eurocode 5 for timber structures.

The resistance when loaded in tension,  $N_{Rd}$ , appears from the table on the right and is the minimum value of the pull-out resistance of the supporting object, the pull-through resistance of the fixed object, and the tension resistance of the screw.

The resistance when loaded in shear,  $V_{Rd}$ , appears from the table on the right and is the minimum value of the bearing resistance of the supporting object and the fixed object, and the shear resistance of the screw.

The theoretical values must be considered indicative since the conditions at the construction site may vary. Practical tests of the specific application are recommended for verification of the listed values.

### Assumptions:

Fixed object: Steel S280GD - EN 10346

Supporting object: Structural wood, C24  
Density,  $\rho_k = 350 \text{ kg/m}^3$

L = Length of the screw [mm]

t = Thickness of the fixed object [mm]

All resistances are stated in kN (1 kN  $\approx$  100 kg)

Safety factor:  $\gamma_M = 1.35$ ,  $k_{mod} = 0.90$

MG/PG: 06 2220 HWH 4.8 X L #1 "A" HX8 ALU-14B

Design resistance when loaded in tension, $N_{Rd}$ [kN]					
t \ L	28	35	50	60	80
0.50	0.82	1.01	1.01	1.01	1.01
0.55	0.82	1.07	1.07	1.07	1.07
0.63	0.82	1.12	1.17	1.17	1.17
0.75	0.82	1.12	1.75	1.75	1.75
0.88	0.82	1.12	1.75	1.99	1.99
1.00	0.82	1.12	1.75	2.17	2.23
1.13	0.82	1.11	1.74	2.17	2.76
1.25	0.81	1.11	1.74	2.16	3.01

Design resistance when loaded in shear, $V_{Rd}$ [kN]					
t \ L	28	35	50	60	80
0.50	0.38	0.51	0.79	0.79	0.79
0.55	0.38	0.51	0.80	0.83	0.83
0.63	0.38	0.51	0.80	0.91	0.91
0.75	0.38	0.51	0.80	0.99	1.04
0.88	0.38	0.51	0.80	0.99	1.10
1.00	0.38	0.51	0.80	0.99	1.15
1.13	0.37	0.51	0.80	0.99	1.19
1.25	0.37	0.51	0.79	0.99	1.19

# DECLARATION OF PERFORMANCE

In compliance with 'REGULATION (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 laying down harmonised conditions for the marketing of construction products' (the Construction Products Regulation or CPR), it is stated that the performance of the construction product identified below is in conformity with the declared performance.

## Product identification

**MG:06 PG:2220 | HWH 4.8 X L #1 "A" HX8 ALU-14B**

(Main Group # Product Group # | Item name)

The screws mentioned above are packed in branded cartons clearly marked with CE according to ETA-10/0021. For specification of the intended use and declared performance of the product please refer to the technical data sheet.

## Placed on the market by:

**ASTON SWEDEN AB**

Hangarvägen 23

SE-691 35 Karlskoga, Sweden

(Name / address)

European Assessment Document: EAD 330046-01-0602

European Technical Assessment: ETA-10/0021

Technical Assessment Body: Deutsches Institut für Bautechnik

Notified Body no.: 0769

System of AVCP: 2+

This declaration of performance is issued under the sole responsibility of the manufacturer identified above.



Morten Johansen  
M.Sc., Engineering



SWEDEN

Company stamp  
RED HORSE | dissing as

2018-04-23

Date of issue