



# SKYLIGHT 71101 71102

www.scan-lamps.no




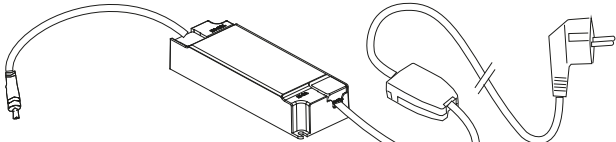
NO: LED-lyskilden er ikke utskiftbare siden de er integrert i konstruksjonen. Når armaturens levetid er slutt skal den byttes ut og leveres til gjenvinning. 50000 tim ≈ 17 år (8 tim/dag)

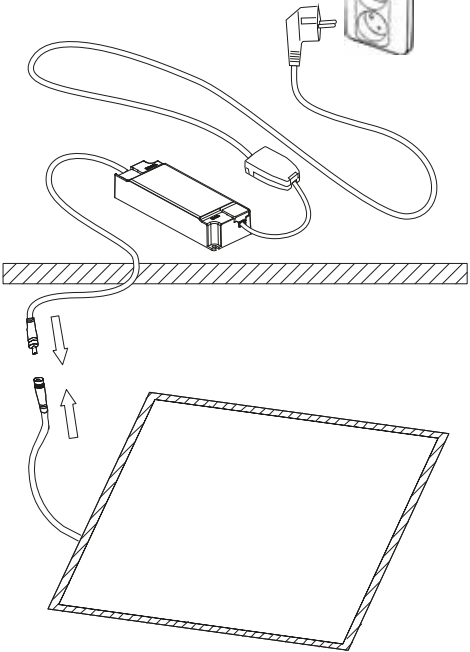
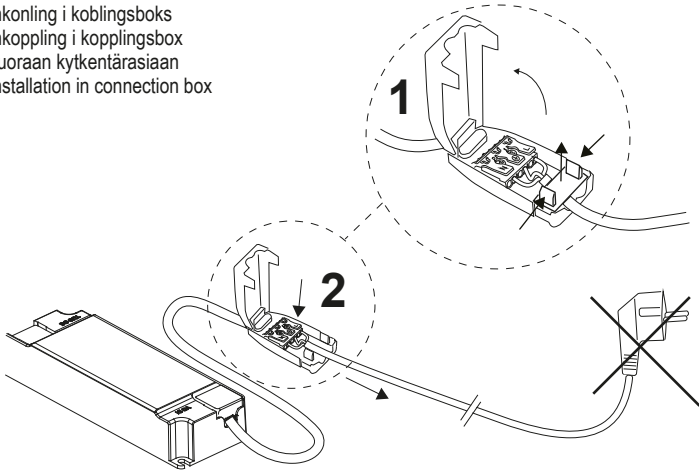
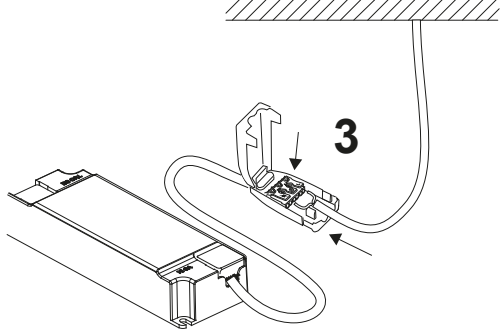
SE: LED-ljuskällan och är inte utbyttbar, när ljuskällans livstid är slut ska hela armaturen bytas och lämnas till återvinning. 50000 tim ≈ 17 år (8 tim/dag)

FI: LED-valonlähde ei voi vaihtaa koska ne on integroitui rakenteeseen. Kun valaisin saavuttaa käyttöikänsä loppuun, se on korvattava uudella ja jätettävä kierrätettäväksi. 50 000 tuntia ≈ 17 vuotta (8 t/päivä)

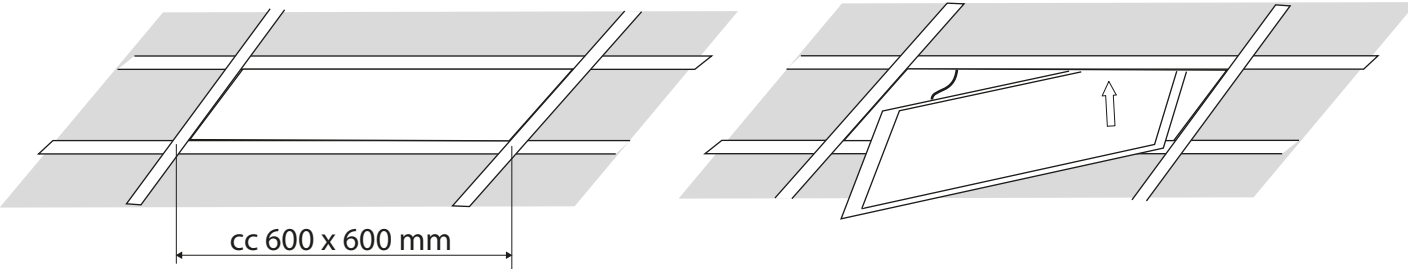
EN: The LED light source is not replaceable as they are integrated in the construction. When the luminaire reaches the end of it's lifetime it shall be replaced and left for recycling. 50000 h ≈ 17 years (8 h/day)

item No.	71101	71102
Light source:	33W LED	
Color temperature:	3000 K	3000 K
Luminous flux:	3630 lm	3630 lm
CRI	>80	
Power consumption:	36 kWh/1000 h	
Lifetime:	50 000 hours	

<p>Driver ikke inkludert Driver medfølger ej Muuntaja ei sis. Driver is not included</p>	<p>SKYLIGHT NON-dimmable driver Art.nr.: 71076-01 NO EL-nr.: 6604115</p> 	<p>SKYLIGHT dimmable driver Art.nr.: 71077-01 NO EL-nr.: 6604116</p> 	<p>SKYLIGHT DALI driver Art.nr.: 71078-01 NO EL-nr.: 6604117</p> 
 <p>inkl. koblingsboks og 2 m kabel med støpsel inkl. kopplingsbox och 2 m kabel med stickpropp with connection box and 2 m cable with plug sis. liitäntärasian sekä 2 m liitosjohdon pistokkeella</p>			

<p>med støpsel med stickpropp pistokkeella with plug</p>	<p>AC 200-240 V</p>	<p>inkonling i koblingsboks inkoppling i kopplingsbox suoraan kytkentärasiaan installation in connection box</p>
		
<p>SE: Installationen ska utföras av auktoriserad elinstallatör. NO: Skal installeres av autorisert elektriker. FI: Asennuksen saa tehdä vain valtuutettu sähköasentaja. EN: Installation should be performed by a qualified electrician.</p>		

Montering i himlingsprofiler / Montering i undertaksprofiler / Mounting in ceiling profiles



cc 600 x 600 mm