

Scanstrip LED strips




71010-01	71018-01	71033-01	71964-01	72026-01	72076-01
71011-01	71019-01	71037-01	71966-01	72028-01	72077-01
71012-01	71020-01	71038-01	71968-01	72029-01	72078-01
71013-01	71021-01	71039-01	71973-01	72031-01	
71014-01	71022-01	71221-01	71974-01	72032-01	
71015-01	71030-01	71222-01	72022-01	72034-01	
71016-01	71031-01	71283-01	72023-01	72035-01	
71017-01	71032-01	71284-01	72025-01	72075-01	


NO: Skal installeres av autorisert elektriker.
SE: Installationen ska utföras av elinstallatör.
FI: Asennuksen saa tehdä vain valtuutettu sähköasentaja.
EN: Installation should be performed by a qualified electrician.

ANETA ALUMINIUM PROFILES:


Profile	COB IP20	COB IP67	COB Slimline IP20	COB RGBW IP20	COB TW IP20	RGBW IP67	Glow IP20/IP65	Glow IP67	Bright IP20	Bright IP65	Bright IP67	Power IP20
RECESSED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SLIM	✓		✓	✓	✓		✓		✓	✓		✓
DEEP	✓		✓	✓	✓		✓		✓	✓		✓
XL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
FLOOR	✓		✓	✓	✓		✓		✓	✓		✓
TILE	✓		✓	✓	✓		✓		✓	✓		✓
CORNER	✓		✓	✓	✓		✓		✓	✓		✓
PLASTERBOARD	✓		✓	✓	✓		✓		✓	✓		✓
PLASTERBOARD XL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
NARROW			✓									
INDIRECT	✓		✓	✓	✓		✓		✓	✓		✓
STEP	✓		✓	✓	✓		✓		✓	✓		✓
PLASTERBOARD EDGE	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓

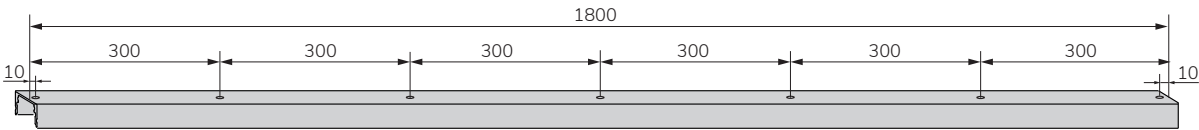


MOUNTING

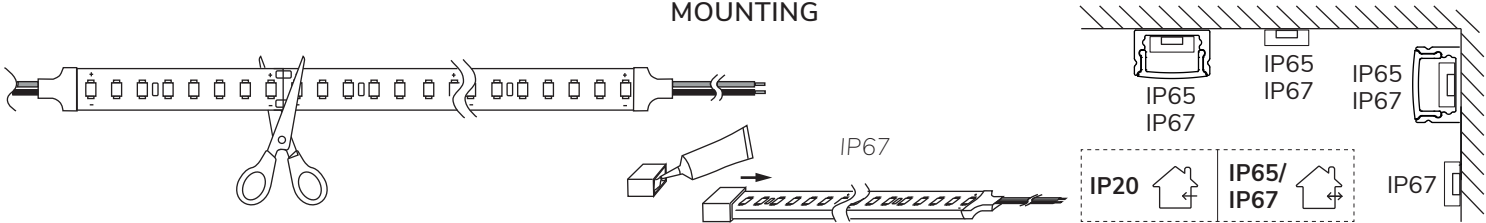


Mounting in aluminum profile

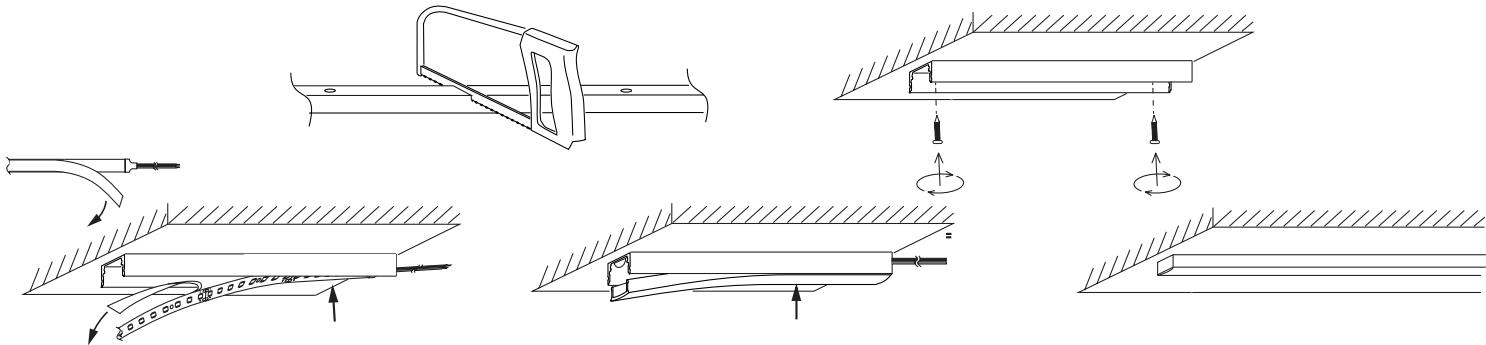

Mounting directly on the surface

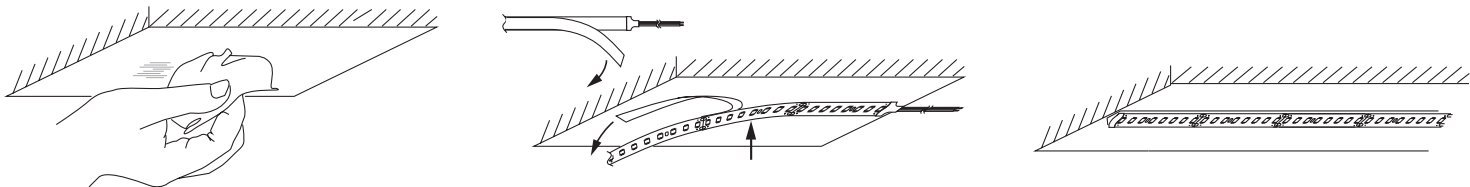

CUT LENGTH AND BENDING

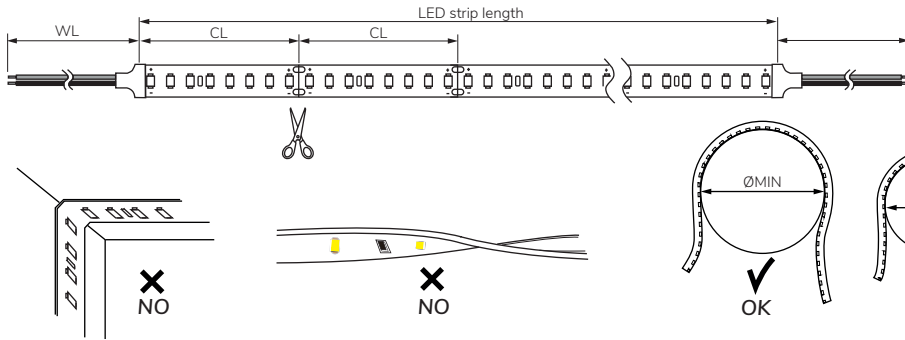


LED strip		
Glow	62,5mm	60mm
Bright	50mm	60mm
Power	50mm	100mm
COB	50mm	20mm
Tunable White	50mm	60mm
RGBW	62,6mm	100mm
COB RGBW	33,33mm	60mm
COB Slimline 4W	50mm	20mm
COB Slimline 10W	41,7mm	20mm
COB Long-Run	33,33mm	60mm
COB Pro	27,8mm	60mm

SCANSTRIP QUICK CONNECTORS

EL-no.	Product	Type	LED strip	Width/type	Dimensions (LxWxH)
3204971	1CCT Feed 10mm	Splice	Single color, 2pin	10mm COB/SMD	12x11,7x5mm
3204972	1CCT Link 10mm	Connection 0,5mm ²	Single color, 2pin	10mm COB/SMD	10x11,7x5mm
3204973	1CCT Feed/Link T/L 10mm	Corner splice	Single color, 2pin	10mm COB/SMD	16x11,7x5mm
3204974	TW Feed 10mm	Splice	TW, 3pin	10mm COB	12x11,7x5mm
3204975	TW Link 10mm	Connection 0,5mm ²	TW, 3pin	10mm COB	10x11,7x5mm
3204976	TW Link Corner 10mm	Corner splice	TW, 3pin	10mm COB	41 x11,7x5mm
3204977	RGBW Feed 12mm	Splice	RGBW, 5 pin	12mm COB	12x13,7x5mm
3204978	RGBW Link 12mm	Connection 0,34m ²	RGBW, 5 pin	12mm COB	10x13,7x5mm
3204979	RGBW Link Corner 12mm	Corner splice	RGBW, 5 pin	12mm COB	44x13,7x5mm

NB - Soldering is always advised

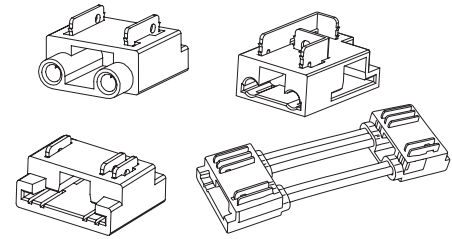

SCANSTRIP DRIVES AND CABLES

24V Dimmable drivers

EL.no.	Product	Wattage	Dimensions
6601124	Scanstrip Dim12 IP65	2,5–12W	50x48x24mm
6601125	Scanstrip Dim25 IP20	2,5–25W	128x52x30mm
6601126	Scanstrip Dim50 IP20	12–50W	184x61x32mm
6601127	Scanstrip Dim100 IP20	34–100W	210x67x34mm
6601128	Scanstrip Dim200 IP67	67–200W	249x72x40mm
6601129	Scanstrip DALI240 IP67	0–240W	250x58x32mm

24V Non dimmable drivers


EL.no.	Product	Wattage	Dimensions
6604121	Scanstrip CTR18	0–18W	115x45x21mm
6604122	Scanstrip CTR40	0–40W	166x52x24mm
6604123	Scanstrip CTR75	0–75W	184x61x32mm
6604124	Scanstrip CTR150	0–150W	210x67x34mm

Scanstrip driver wire run length indication table

EL -no.	Scanstrip	Load	0,34 mm ²	0,5 mm ²	0,75 mm ²	1 mm ²	1,5 mm ²	2,5 mm ²
6601124	DIM12	9,6W	29 m	43 m	64 m	86 m	129 m	214 m
6601125	DIM25	20W	14 m	21 m	31 m	41 m	62 m	103 m
6601126	DIM50	40W	7 m	10 m	15 m	21 m	31 m	51 m
6601127	DIM100	80W	3,5 m	5 m	7,5 m	10 m	15 m	26 m
6601128	DIM200	160W	1,5 m	2,5 m	4 m	5 m	8 m	13 m
6604121	CTR18	14,4W	19 m	29 m	43 m	57 m	86 m	143 m
6604122	CTR40	32W	8,5 m	13 m	19 m	26 m	39 m	64 m
6604123	CTR75	60W	4,5 m	7 m	10 m	14 m	21 m	34 m
6604124	CTR150	120W	2,5 m	3,5 m	5 m	7 m	10 m	17 m
6601129	DALI240	192W	1,5 m	2 m	3 m	4 m	6,5 m	11 m

Voltage drop = 2 x length x amps x resistance cross section

Driver connection

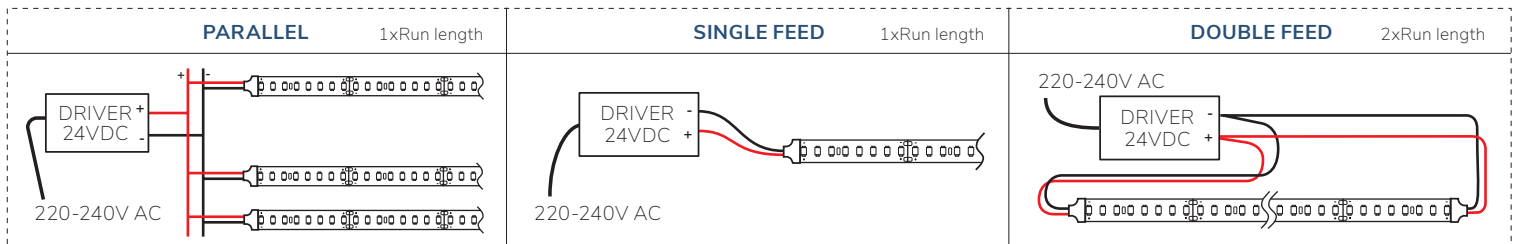

See each strip for max run length

Cables

GLOW / BRIGHT / POWER / COB	TUNABLE WHITE	RGBW / COB RGBW
+24V rød / rød / red 0V svart / black	+24V rød / rød / red 0V hvit / vit / white 0V gul / yellow	+24V svart / black 0V hvit / vit / white 0V rød / rød / red 0V grøn / grön / green 0V blå / blue
EL.no. 3246847 Product Splice 1CCT – 0,5mm ²	EL.no. 3246848 Product Splice TW – 0,5mm ²	EL.no. 3246849 Product Splice RGBW – 0,34mm ²