


ZET  
60921

www.aneta.se  
www.aneta.no

Typ 60921-a

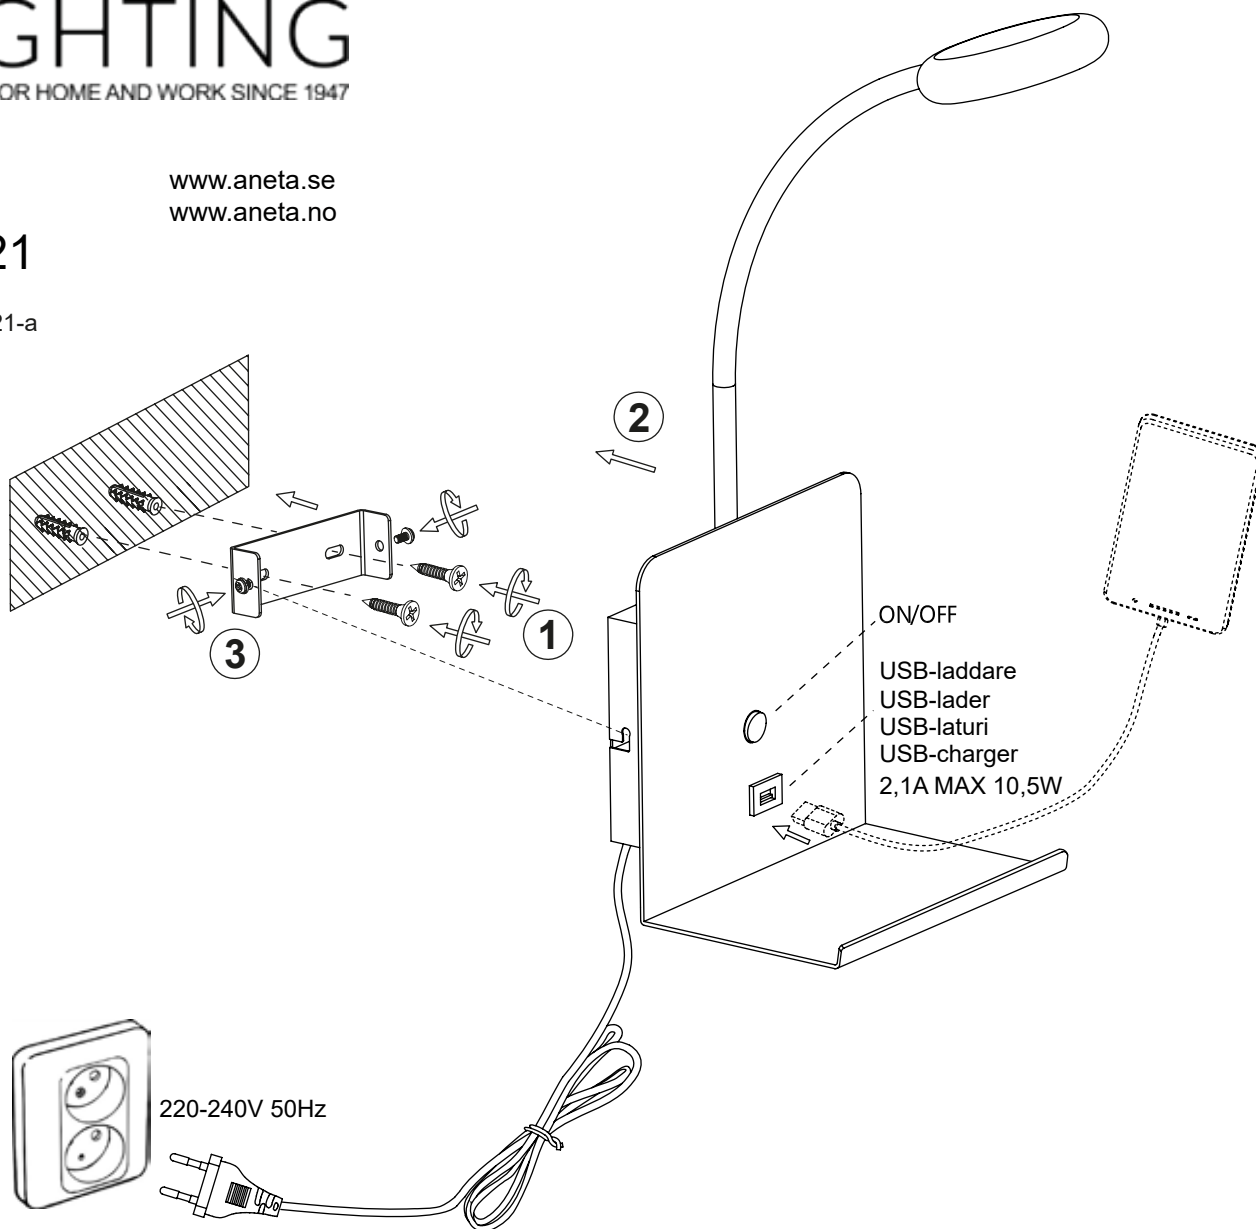

SE: Denna produkt innehåller en ljuskälla med energieffektivitetsklass F. Lysdioden är utbyttbar som reservdel. 50000 tim ≈ 20 år (6 tim/dag)

NO: Dette produktet inneholder en lyskilde med energieffektivitetsklasse F. Diodelyskilden kan skiftes som reservdel. 50000 tim ≈ 20 år (6 tim/dag)

FI: Tämä tuote sisältää valonlähteen, joiden energiatehokkuusluokka on F. LED valolähde vaihdetta vissa, löytyy varaosana. 50 000 tuntia ≈ 20 vuotta (6 t/päivä)

EN: This product contains a light source of energy efficiency class F. The LED-chip is exchangeable as a spare part. 50000 h ≈ 20 years (6 h/day)

Light Source data:

|                                       |                 |  |               |
|---------------------------------------|-----------------|--|---------------|
| Lighting technology used: .....       | LED             | CCT colour temperature:.....                     | 3000 K        |
| Mains or non-mains: .....             | non-mains       | On-mode power: .....                             | 4,7 W         |
| Directional or non-directional: ..... | non-directional | Stand-by power: .....                            | N/A           |
| Connected L.S.: .....                 | no              | Networked standby power: .....                   | N/A           |
| Color-tunable: .....                  | no              | CRI: .....                                       | ≥ 80          |
| Envelope: .....                       | no              | R9 color rendering index: .....                  | 1             |
| High luminance: .....                 | no              | sdc <sub>m</sub> : .....                         | < 4           |
| Anti-glare shield: .....              | no              | Chromaticity coordinates (X, Y): .....           | 0.440, 0.403  |
| Dimmable: .....                       | no              | Lifetime L <sub>70</sub> B <sub>50</sub> : ..... | 50 000 hours  |
| Energy consumption in on-mode: .....  | 5 kWh / 1000 h  | Lumen maintenance factor: .....                  | 0.90          |
| Energy efficiency class (A-G): .....  | F               | Survival factor: .....                           | 0.96          |
| Useful luminous flux:.....            | 485 lm *        | Power supply input: .....                        | 0,3A ~15,7VDC |

\* The luminous flux stated here is the value for the light source itself in accordance with Regulation (EU) 2019/2015. The luminous flux stated on the packing box is for the lighting fitting, where the light from the light source is partly absorbed by glass/glare shield/shade and parts of the fitting, and is therefore lower than for the light source.

SE: Kabeln kan ej bytas ut. Om kabeln på lampans blir skadad skall lampans förstöras och lämnas till återvinningsstation.

Rengöring: Torkas med torr trasa.

NO: Ledningen kan ikke skiftes. Hvis ledningen til lampen blir skadet må lampen ødelegges og leveres til gjenvinningsstasjon. Rengjøring: Tørkes av med tørr klut.

FI: Johtoa ei voi vaihtaa. Jos johto on vahingoittunut tuhoa valaisin ja toimita valaisin kierrätyspisteeseen.

Siivous: Pyyhi kuivalla liinalla.

EN: The cable or cord of this luminaire cannot be replaced. If the cord is damaged the luminaire shall be left to recycling.

Cleaning: Wipe with a dry cloth.