



# ISP2-16-10-50






## Installation

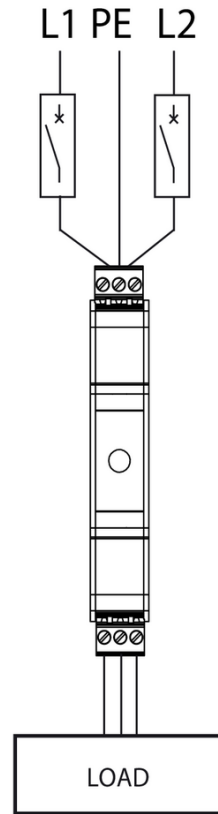

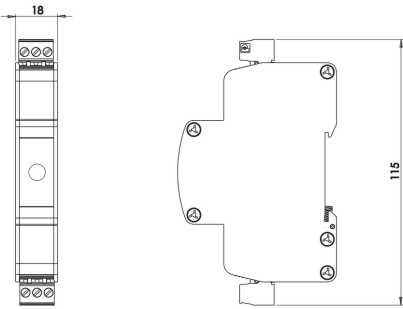
## Dimensions



## Terminals




|                       |  |
|-----------------------|--|
| Terminal Type         |         |
| min Capacity          | 0.5 mm <sup>2</sup>  |
| max Capacity          | 2.5 mm <sup>2</sup>  |
| Torque                | 0.6 Nm  |
| Wire Stripping Length |         |
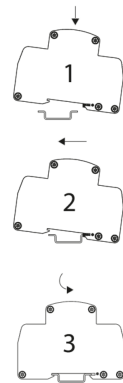
## Mounting









## Specifications

### Electrical Specifications

|                               |   |                     |
|-------------------------------|---|---------------------|
| Connection type               |  | Series              |
| Modes of protection           |  | L1-L2, L1-PE, L2-PE |
| Nominal voltage               | U <sub>0</sub>  | 45VAC               |
| Short circuit withstand level | I <sub>SSCR</sub>   | 10kA                |
| Maximum backup fuse           |  | 16A                 |

### Mechanical Specifications

|                               |   |               |
|-------------------------------|---|---------------|
| Minimum operating temperature |  | -40°C         |
| Maximum operating temperature |  | 70°C          |
| Minimum operating humidity    |  | 5%            |
| Maximum operating humidity    |  | 95%           |
| Mounting method               |  | TS35 DIN Rail |
| Environmental rating          |  | IP20          |