IDD2-12-30

Installation

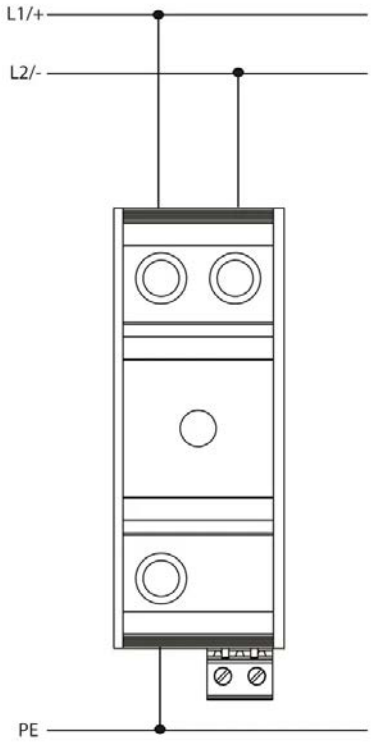

Mounting

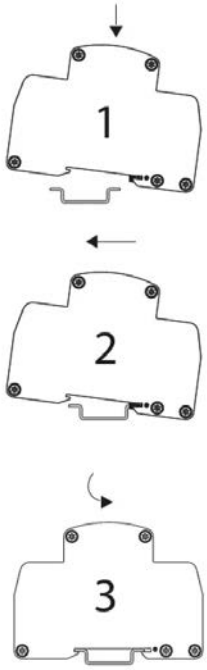

Alarm



11-14 closed	✓
11-14 open	✗

Terminals

Terminal Type		
min Capacity	2.5 mm²	0.5 mm²
max Capacity	16 mm²	2.5 mm²
Torque	2 Nm	0.6 Nm
Strip Length	12mm	5mm

Dimensions

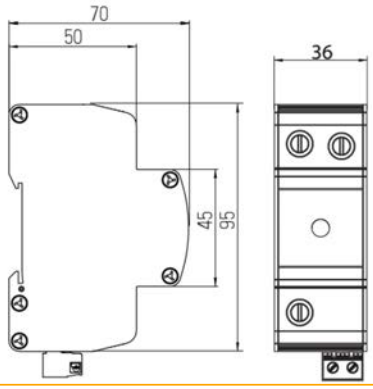

Electrical Specifications

Connection type		Shunt
Number of ports		1
Location		Indoor
Maximum backup fuse		10A
Recommended SCB		SCB1-3-80
Earth leakage current	I_{PE}	<10µA

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20

72 Browns Road, Kingston Tasmania 7050 Australia
+61 3 6229 7233 sales@novaris.com.au
NOVARIS
www.novaris.com.au