



AFQm-4WP-070R-550

AFQm-4WP-070R-550, Active multifunctionfilter

Code: R7NR6P.

- > System: 4 wires, 400...550 V
- > Phase current (A): 70
- > Peak current (A): 140
- > Max.neutral current (A): 210
- > Mounting: Rack

Description

The floor mounted **AFQm** multilevel active filters are the most complete solution for solving power quality problems in three-phase industrial, commercial or service installations caused by the presence of harmonics and the consumption of reactive power. These following characteristics and functions have been implemented in the cabinet type active filters:

- Filtering capacity per module of 100 A, capacity per cabinet between 100 A to 400 A
- Cabinets expandable with small-sized rack modules
- Range for installations with 3 wires (3W model) or 4 wires (4W model)
- Multi-range voltage and dual frequency (50/60 Hz)
- Reduction of harmonic currents up to the fiftieth harmonic (2,500 Hz)
- Selection of harmonic frequencies to be filtered for maximum filter effectiveness
- Power factor correction both inductive and capacitive
- Phase current balancing, improvement of consumption in neutral (4W model)
- If higher filtering capabilities are required, the system can be expanded using AFQm racks connected in parallel (all filters/racks must be of the same 3- or 4-wire model)

Application

They are an ideal solution for installations with a large amount of single-phase and three-phase loads generating harmonics, such as computers, UPS units, lights, lifting equipment, air-conditioning systems with variable speed drives, etc.

They can also be used in installations that require a good power quality for the purpose of increasing production efficiency and improve supply continuity in the system.



AFQm-4WP-070R-550

Code: R7NR6P.

Specifications

AC power supply	
Installation category	4 kV, CAT III Class 1
Frequency	50 / 60 Hz (± 5 %)
Nominal voltage	208 ... 550 V~ F-F (± 10 %)
Mechanical characteristics	
Size (mm) width x height x depth	482.5 x 266 x 714.5 (mm)
Envelope	Galvanized steel 1,5 mm
Noise	< 70 dBA
Connection type	Network: M8 ring terminal, Ground: M10 ring terminal, Current: 6-pole connector, RS-485: 3-pole connector, Ethernet: RJ-45
Weight (kg)	55
Environmental characteristics	
Protection class	IP 20
Relative humidity (without condensation)	0 ... 95 %
Storage temperature	-20 ... +50 °C
Working temperature	-10 ... +45 °C
Electrical characteristics	
Conditional short-circuit current (Icc)	40 kA
Rated peak current Ipk	84 kA
Current crest factor	2:1
Maximum phase current	70 A (RMS)
Maximum neutral current	210 A (RMS)
Rated diversity factor (RDF), simultaneity	1
Earthing system	TN, TT
Current measurement circuit	
Transformation ratio	5 ... 5000 / 5A
Communication Network	
Protocol	TCP/IP, Modbus TCP
Technology / Interface	Ethernet
Standards	
Electrical safety, Maximum height (m)	3000 (2000 m without performance degradation)
Standards	IEC 61000-6-4, UNE-EN 55011, IEC 61000-6-2, IEC 62477-1, IEC 61439-1
User interface	
Display type	TFT color, 3.5" touchscreen



AFQm-4WP-070R-550

Code: R7NR6P.

Measurement accuracy	
Voltage harmonics (THD)	25 % (max)
Features / performance	
Phase compensation	Selectable
Reactive power compensation (Kvar)	selectable
Filtering / Response time	2° ... 50° harmonic (selectable) / < 100 µs
Parallel assembly/installation	Up to 100 units, with different gauges. CTs connection only to the "master" unit Advanced management algorithm: Maximizes the life of the devices (alternate operation of devices). Maximises operational efficiency (Only the necessary filters are activated). Allows redundancy (system operation in the event of device malfunction).
Priority scheduling	selectable
Power supply output	
Power	66700 VA
Serial communication	
Protocol	Modbus / RTU
Technology / Type	RS-485

AFQm-R
Active multifunction filter

CODE	TYPE	System	Phase current (A)	Peak current (A)	Max.neutral current (A)
Rack module					
R7JR6P.	AFQm-3WP-070R-690	3 wires, 400...690 V	70	140	
R7NR6P.	AFQm-4WP-070R-550	4 wires, 400...550 V	70	140	210
R7MR2P.	AFQm-3WP-100R-480	3 wires, 230...480 V	100	200	
R7RR2F.	AFQm-4WF-100R-400	4 wires, 230...400 V	100	200	300
R7RR2P.	AFQm-4WP-100R-400	4 wires, 230...400 V	100	200	300


Please contact our technical department for networks with high THD(V) levels.
All equipment has built-in EMI filters



AFQm-4WP-070R-550

Code: R7NR6P.

Dimensions

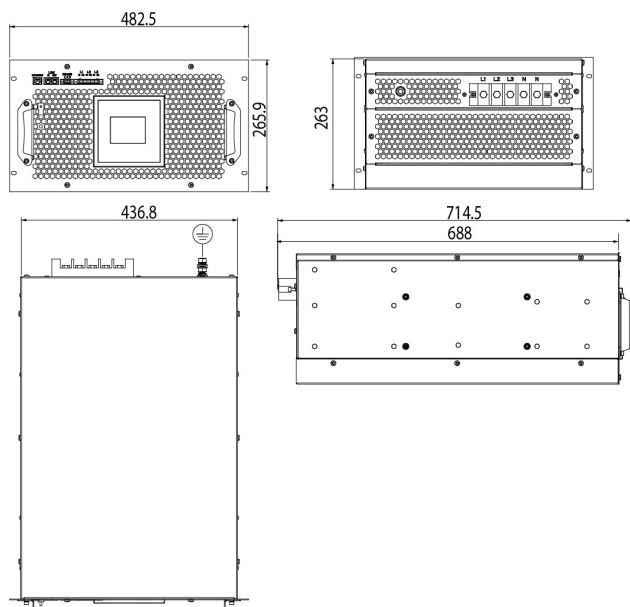

Connections

