


Product No: OT250E04YP

ABB OT250E04YP BY-PASS SWITCH OT250E04YP

FEATURES

- Transition type: Open.
- Including black plastic pistol type handle.
- Degree of Protection: IP20 (Front) / IP65 (Handle).
- I-0-II position pistol type.
- Handle padalockable in 0-position.
- Door interlock in land II-positions.

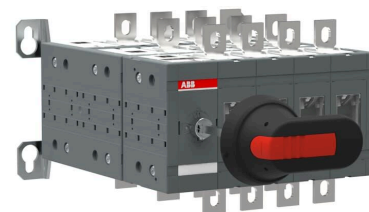

General Information

Brand	ABB
Product Type	Manual
Suitable For	Distribution Board Installation
Type	Main Switch

Technical Attributes

Conventional Free-Air Thermal Current - I _{th} (A)	250
Maximum Operational Voltage AC (V)	1000
Mode of Operation	Front
No. of Poles	4
No. of Switches	1
Padlockable	Padlockable in O-position
Position of Line Terminals	Top In - Bottom Out, Bottom In - Top Out
Power Loss (W)	6.5
Rated Impulse Withstand Voltage (kV)	12
Rated Insulation Voltage (V)	1000
Rated Operational Current AC-21A 415V (A)	250
Rated Operational Current AC-22A 400-415V (A)	250
Rated Operational Current AC-23A 380-415V (A)	250
Rated Operational Current AC-23A 400-415 V (A)	250
Rated Operational Power AC-23A 380-415V (kW)	140
Rated Operational Power AC-23A 400-415 V (kW)	140
Rated Operational Voltage (V)	1000
Rated Operational Voltage AC (V)	400 - 415

Technical Attributes

Rated Short-Time Withstand Current - I _{cw} (kA)	8
Terminal Type	Bolt
Transition Type	Open

Physical Attributes

Control Element Colour	Black
Handle Type	Pistol
Included	Handle, Shaft
Interlockable	Yes
Mounting Type	Front Mount 4-hole

Dimensions

Dimensions (mm)	229W x 150H x 236D
Weight (kg)	7.5

Protection & Standards

Degree of Protection	IP20
NEMA Degree of Protection	1
Pollution Degree	3

Resources

Product catalogue (Flipbook)	Download from here
------------------------------	------------------------------------