

Product No: CSXi055V4C2

AuCom CSXi055V4C2 SOFT STARTER 55KW 100A 200-440VAC, CONTROL 24VAC/DC

FEATURES

- - 18A ~ 200A Complete with Internal Bypass.
- - Mains voltage: 200~440VAC (V4).
- - Protection: IP20/IP00, 3 frames sizes.
- - Soft Start and Soft Stop Motor overload, Phase sequence. protection and Excess start time.
- - 7 Adjustments: Current ramp, Current limit, Motor trip class, Soft stop time, Excess start time, Auxiliary relay function, Phase sequence protection.
- - Compact and light weight.
- - Integrated bypass contactors.
- - Motor protection against operational overload, current spikes & fluctuations.
- - Plug-in communication interfaces.
- - Insulating finger guards.



General Information

| | |
|--------------|-------------------------|
| Brand | AuCom |
| Product Type | Compact & Simple - CSXi |

Technical Attributes

| | |
|---|---|
| Current Consumption (A) | 2 (At power-up) |
| EMC Emission | Equipment Class - A |
| Heat Dissipation During Run (W) | 10 (Typical) |
| Heat Dissipation During Start (W/A) | 3 |
| Input Voltage AC (V) | Start: NO 300 (Max.)/ Stop: NC 300 (Max.) |
| Motor Power - Medium Duty 400-415V (kW) | 55 |
| Rated Control Supply Voltage AC/DC (V) | 24 |
| Rated Current - Heavy Duty (A) | 96 |
| Rated Current - Medium Duty (A) | 100 |
| Rated Supply Voltage AC (V) | 200 - 440 |

Physical Attributes

| | |
|------------------------------------|------------|
| Operational Temperature Range (°C) | -10 to +60 |
|------------------------------------|------------|

Dimensions

| | |
|-----------------|--------------------|
| Dimensions (mm) | 145W x 215H x 193D |
|-----------------|--------------------|

Protection & Standards

| | |
|----------------------|------|
| Degree of Protection | IP20 |
|----------------------|------|




| | |
|------------------|---|
| Pollution Degree | 3 |
|------------------|---|

| | |
|-------------------------|------------------------------------|
| Standards and Approvals | C-tick, UL / C-UL, CE, CCC, Lloyds |
|-------------------------|------------------------------------|

Resources

| | |
|------------------------------|------------------------------------|
| Product catalogue (Flipbook) | Download from here |
|------------------------------|------------------------------------|

DIMENSIONS

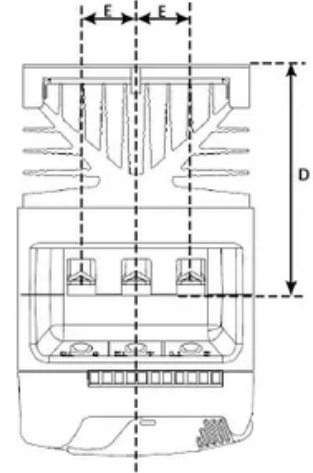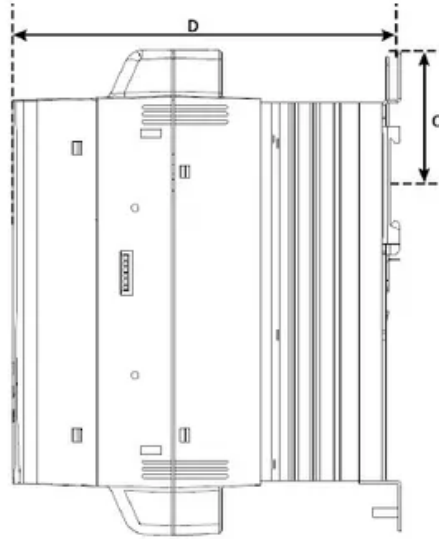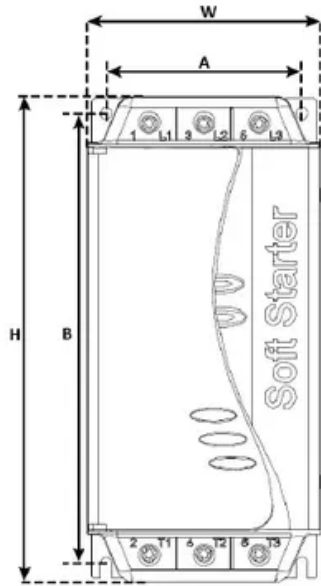

| | |
|--------|-------|
| W (mm) | 145 |
| H (mm) | 215 |
| D (mm) | 193 |
| A (mm) | 124 |
| B (mm) | 196 |
| C (mm) | - |
| D (mm) | 110.5 |
| E (mm) | 37 |