

**FLISE ■■■[®]
KOMPANIET**




FUG

**Cement-based sealing compound that is
used for grouting ceramic tiles, mosaics and
hard-burned bricks on floors and walls.**

15 KG

DATABLAD F1 FUG

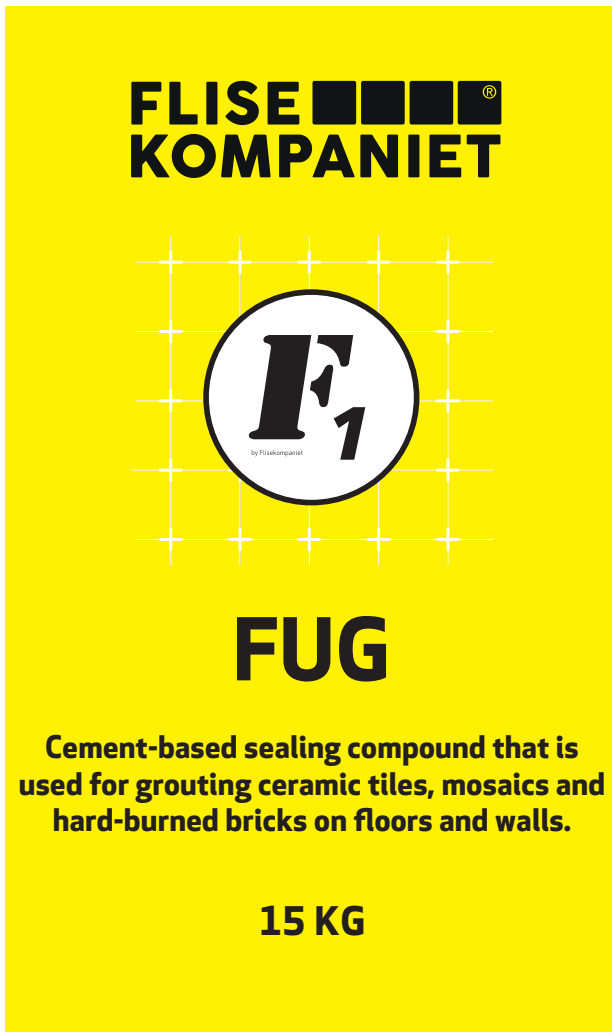

UFI-NR: W6YP-W5NA-X00S-K84E

DANGER - CEMENT 30-60% Causes skin irritation. Causes serious eye damage. May cause respiratory irritation. Avoid breathing dust. Wear protective gloves/protective clothing/eye protection/face protection.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical advice/attention.

IF ON SKIN: Wash with plenty of soap and water. Dispose of contents / container to licensed waste disposal site in accordance with local Waste Disposal Authority.

KEEP OUT OF REACH OF CHILDREN.

Description - Applications

F1 Fug is a cement-based sealing compound that is used for grouting ceramic tiles, mosaics and hard-burned bricks on floors and walls. Application temperature should be between +10 and +25°C. This also applies to the underlying surface. Grouting widths 3-12 mm.

Preparation - Surface

All sources of heat in the room must be turned off before work starts. Underfloor heating must be turned off in good time before sealing and grouting. There must be no free water in the joints.

Mixing

F1 Fug is mixed with approximately 0.3 litres of plain water per kilo of powder. Mix using a drill with a universal mixer. Mix for 2 - 3 minutes, until a smooth paste without lumps is achieved. Let the compound stand for about 5 minutes; adjust with a little water if needed and mix again. F1 Fug is now ready to use and must be used within 1-2 hours.

Application

F1 Fug is applied with a rubber spreader or grouting trowel. Apply the mixture over the joints diagonally and make sure they are completely filled. How large an area can be grouted at a time depends on the room temperature, so start with a small area. Cleaning off can begin when the grouting has set somewhat, normally after 20-30 minutes. Note that the absorption of the tiles can also affect when cleaning off can begin. Use a damp, straight-cut sponge to clean off the surplus grouting. Do not press so hard that the grouting is dug out of the joints and rinse the sponge often. On walls, work from the top downwards. When the tile surface is dry, polish off with a dry, soft cloth or cleaning cushion until the tiles are clean and the joints even.

NOTE! On continuous surfaces, it is recommended to use grouting from the same production number. Different absorption in the tiles and substrate, uneven water addition and uneven drying off can cause colour differences. Tools may be cleaned with water.

Afterwork - Drying time

Avoid walking on the surface for the first 24 hours. Grouting marks on the surface can be removed with KLINKERRENS, but not less than 24 hours after grouting. Floors can normally be walked over the day after grouting.

Coverage

0.3-1 kilo per m² depending on joint width and depth and the tile format.

Storage

Store in a dry place. Best used within 1 year of production date.

Desember 2023

FLISE KOMPANIE