







Opus

Gulvunderlag Parkett



Aquastop Ultra Natur 2 mm

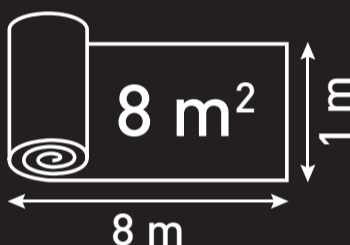

Information on the emission level of volatile substances in the air inside a room that poses a risk of inhalation toxicity on a scale from class A+ (very low emission) to C (high emission).

NOR

PROFESJONELT UNDERLAG FOR FLYTENDE INSTALLASJON AV TREGULV

Materiale: PUM/PET

Over 93% naturlige ingredienser, og 100% resirkulerbart. Inneholder ikke formaldehyd. Flott løsning for gulvvarme - den svært lave verdien for termisk motstand resulterer i effektivt utnyttelse av gulvvarmen og sparer energi. Meget god på akustikk og reflektert ganglydisolasjon. Høy trykkfasthet sikrer låser og minimerer knirk.

EN

PROFESSIONAL UNDERLAY DEDICATED FOR WOODEN FLOOR, INSTALLED AS FLOATING FLOOR (E.G. ENGINEERED WOOD)

Material: PUM/PET

Made in over 93% from natural ingredients and it is 100% recyclable. It does not contain formaldehyde. Great solution for underfloor heating - the very low coefficient of thermal resistance [0,008 m²K/W] results in effective performance of underfloor heating and saves energy. Very good acoustic specification: acoustic isolation (IS) - 17 dB, as well as reflected walking sound insulation (RWS) - 25%. High compressive strength (CS) secures locks and minimise of creaks of wooden floor.



Nobb 56838944



7 043614 022139

Optimera AS

Postboks 40 Haugenstua
0915 Oslo
Tel.: 22 16 88 00
www.optimera.no