


Staple type: W16 Staples
16 GAUGE STAPLES WIDE CROWN
 Wire Ø: 1.52mm





Suitable for the following tools*:

Paslode	S200 W16
	S150 W16R
	3150 W16
	3200 W16 (R)
Toolmatic	S520.4805
<i>*please check staple length compatibility with each tool before use</i>	
Staple lengths available:	16mm – 50mm
Staples per strip:	72

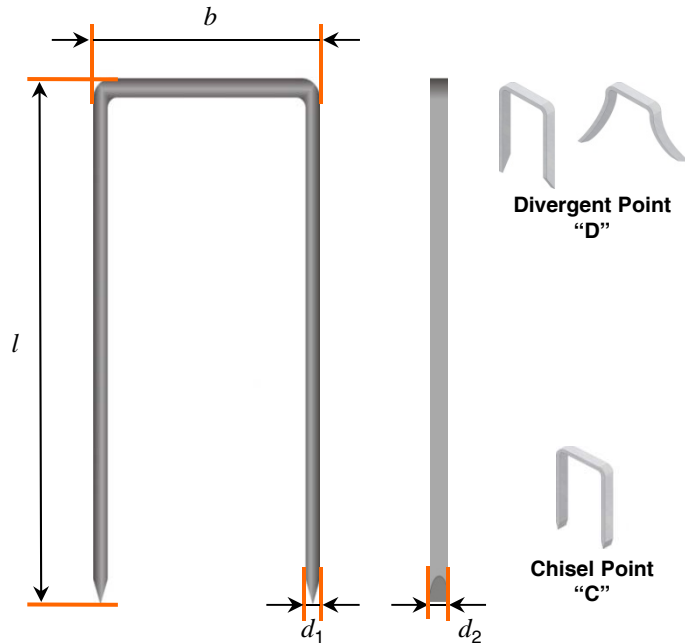

CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 1-3µm	INDOOR 	Blue
Stainless Steel A2 AISI 304 / WNr 1.4301	INDOOR, COVERED OUTDOOR & OUTDOOR 	Yellow

STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire:	min 880 N/mm ²
Nominal diameter (<i>d</i>):	1.52mm
Flattened wire dimension:	(<i>d</i> ₁): 1.39mm (<i>d</i> ₂): 1.58mm
Outside crown width (<i>b</i>):	23.30mm
Strip length:	approx 115.00mm
Standard point:	“C” & “D”
Coated leg length:	Full

STAPLE LENGTHS AVAILABLE*

Finish	Lengths Available <small>*Other lengths on request</small>
Zinc Galv 1-3µm	'C' Point: 16mm, 19mm, 22mm, 25mm, 28mm, 32mm, 38mm, 50mm 'D' Point: 16mm, 25mm
Stainless Steel A2 AISI 304 / WNr 1.4301	50mm

Paslode is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.