



Staple type: KL 500
 18 GAUGE STAPLES MEDIUM CROWN
 Wire Ø: 1.15mm

Suitable for the following tools*:

haubold PN 530 L-1 / Automatik LM
 PN 540 (L-1)
 PN 530 / 540 V
 PN 540 A

**please check staple length compatibility with each tool before use*


Staple lengths available: 30mm – 40mm
 Staples per strip: 104

For fixing of non load-bearing gypsum plasterboard systems onto timber



CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 3µm	Service Class 1 INDOOR	Blue

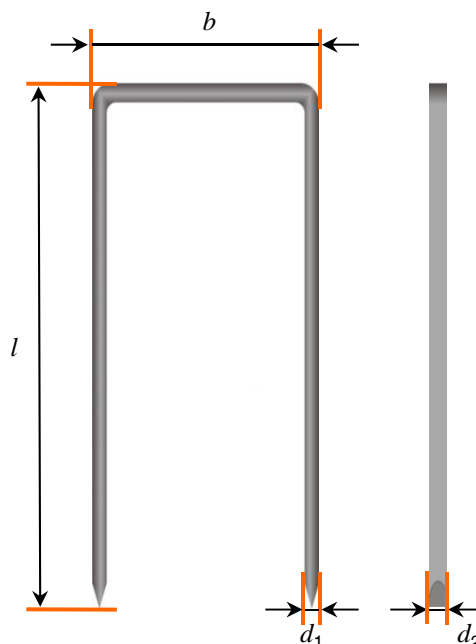

EN 14566:2008
 +A1:2009

DIN 18182-B



Chisel Point
 "C"

STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire: min 900 N/mm²
 Nominal diameter (d): 1.15mm
 Flattened wire dimension: (d₁): 1.00mm
 (d₂): 1.23mm
 Outside crown width (b): 11.00mm
 Strip length: approx 128.00mm
 Standard point: "C"
 Coated leg length: Full

RECOMMENDED EDGE DISTANCES

ITW recommended minimum edge distances:

Tapered Edge Plasterboard = 10mm
 Cut Edge Plasterboard = 15mm

For more comprehensive information please contact your gypsum board manufacturer.

STAPLE LENGTHS AVAILABLE

Finish	Lengths Available
Zinc Galv 3µm	30mm, 35mm, 40mm

haubold is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.