

LEARO®

ASSEMBLY GUIDE

SCAN QR FOR
INSTRUCTIONS AND
MORE INFO



LEARODESIGN.COM

Insert the square spindle
into the lock case.

*(This is the metal rod that connects the
two handle parts through the door.)*



Sett inn
firkantstang i låskassen.
*(Dette er metallstangen som forbinder
håndtaksdelene gjennom døren.)*



Merk: Stram alle skruer til de sitter godt, men ikke overstram. Ikke bruk drill.

Note: Tighten all screws until they are secure, but do not overtighten. Do not use a power drill.


Mount both back parts and fasten it with the 4 supplied screws. Tighten the screws onto the square shaft.



2



Monter begge bakkdeler og fest med de 4 medfølgende skruene. Stram skruene til firkantstaget.

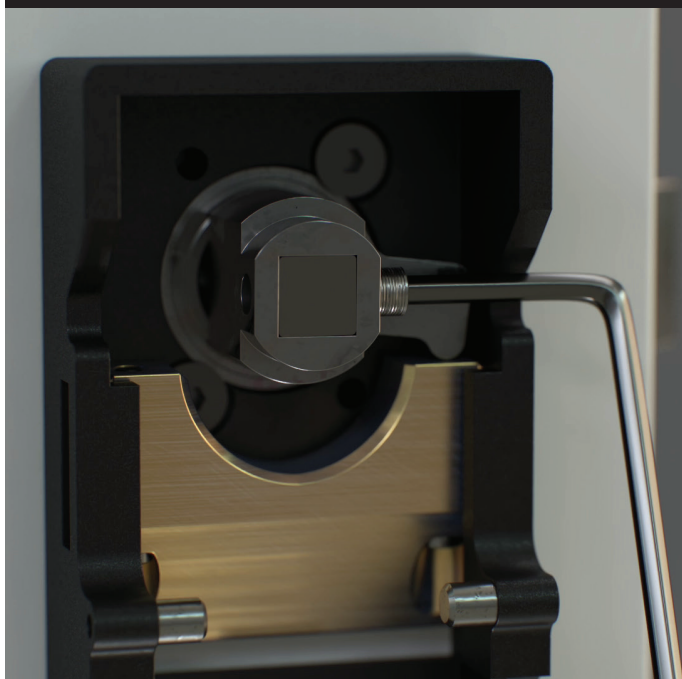

Tappen skal være nedentil denne ved montering, for å enkelt komme til alle hull. Skyv tapp opp før montering av overdeler.

During installation, the pin must be positioned at the bottom to allow easy access to all holes. Slide the pin up before installing the upper sections.

Loosen the two screws on each bottom section. Then install the bottom section on each side and fasten the screws again.



3



Løsne de 2 skruene på hver underdel. Monter deretter underdel på hver side og fest skruene igjen.



Merk: LEARO dørhåndtak er utviklet for riktig monterte dører med ca. **3 mm avstand mellom dørblad og karm.**

På skeive dører kan enkel justering være nødvendig. Dersom døren er skeiv eller feiljustert kan dørhåndtaket berøre karmen – dette omfattes ikke av garantien

Note: LEARO door handles are designed for properly installed doors with approximately **3 mm clearance between the door leaf and the frame.** On misaligned doors, minor adjustment may be necessary. If the door is crooked or incorrectly adjusted, the door handle may come into contact with the frame – this is not covered by the warranty.


Keep the door in the open position. Use the included tool to assist.



4



Hold døren i åpen posisjon.
Bruk det medfølgende
verktøyet for montering.

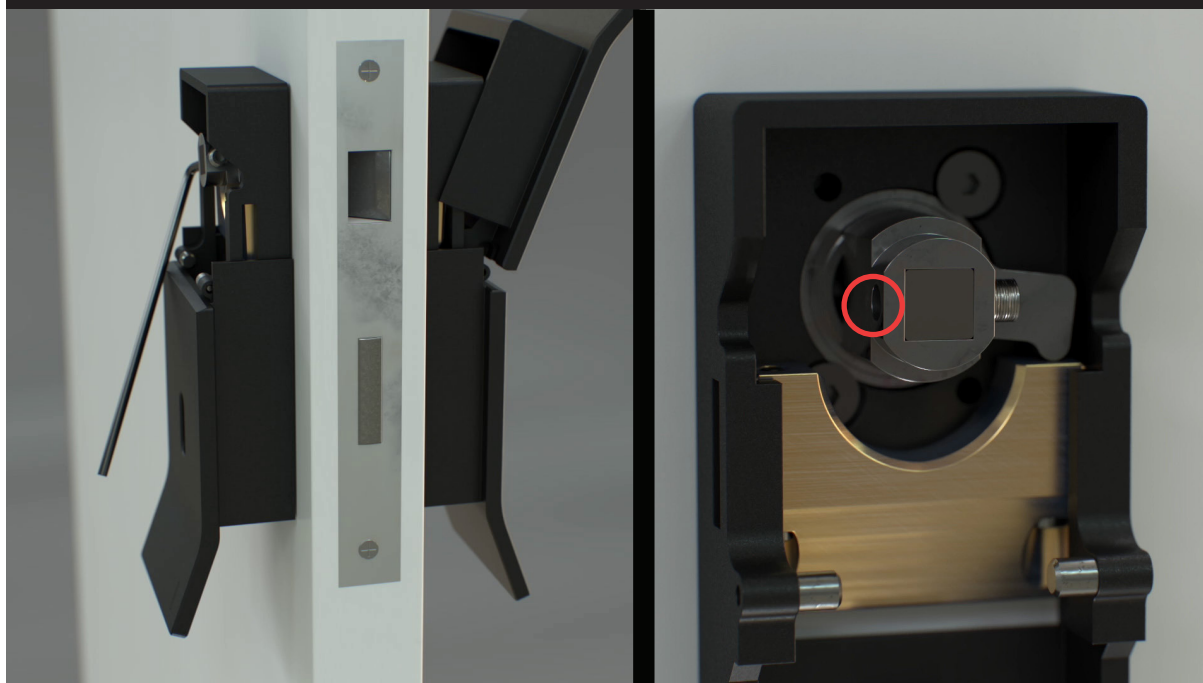

Attach the top section.
*(Ensure all parts are aligned and
tightened before closing the door.)*



5



Monter overdelen.
*(Sørg for at alle deler er justert
og festet før døren lukkes.)*



Optional tightening:

Loosen the two screws on the bottom section closest to the edge of the door. Slide up the included tool and tighten until the top section is firmly secured.



6



Valgfri etterstramming:

Løsne de to skruene på underdelen nærmest dørens kant. Før opp det medfølgende verktøyet og stram til til overdelen sitter godt.



Done.



7



Ferdig.

