




## DIMPLED MEMBRANE GXP PLUS 0,5

**Applications:** dampproof protection of foundations, in construction of insulating systems, in drainage systems and as a moisture barrier and watertight protection of underground elements with ventilation function, in waterproofing of drainage ditches, protective layer in roofs with reversed insulation (type V and type T).

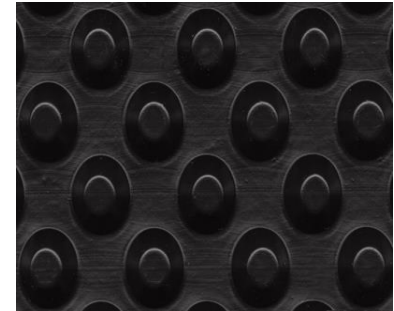

**Composition:**

HDPE (high density polyethylene) in thickness 0,52 mm

**Functions:** dampproof barrier, waterproofing, separation, ventilation, drainage of water vapour, protection of thermal insulation.

**Harmonised Technical Specification:** EN 13967:2012

Essential characteristics	Performance	Test method
Water tightness	Watertight at 60 kPa	EN 1928:2002 (60 kPa)
Water tightness after artificial ageing	Watertight at 60 kPa	EN 1928:2002 after EN 1296 (70°C/ 12 weeks)
Water tightness after exposure to alkali	Watertight at 60 kPa	EN 1928:2002 after EN 1847 (23°C/ 28 days)
Tensile strength	MD $\geq 8,0$ kN/m CMD $\geq 8,4$ kN/m	PN-EN ISO 10319:1996
Elongation	MD $\geq 122$ % CMD $\geq 91$ %	EN 12311-2:2013
Maximum tensile force	MD 343 ( $\pm 16$ ) N/50mm CMD 374 ( $\pm 15$ ) N/50mm	EN 12311-2:2013
Elongation at break	MD $\geq 30$ % CMD $\geq 25$ %	PN-EN ISO 10319:1996
Pressure resistance	270 (-50) kN/m <sup>2</sup> / 270 (-50) kPa	EN ISO 25619-2
Reaction to fire	Class F	EN 13501-1
Resistance to Static Puncture (CBR)	>820 N	GGM 1701
Height of dimples (product thickness)	8 mm	-
Unit weight	500 g/m <sup>2</sup> (+/- 10%)	PN-EN 9864-1:2007
Thickness (in cross-section)	0,52 mm (+/- 10%)	PN-EN ISO 9863-1:2007
Microbiological resistance	Maintained resistance 100%	PN-EN 12225
Temperature resistance	- 40 °C till + 80 °C	-
Roll length	20 ( $\pm 0,4$ ) m	PN-EN 1848-2
Roll width	0,5; 1,0; 1,5; 2,0; 2,5; 3,0; 4,0 m ( $\pm 2\%$ )	PN-EN 1848-2

Note: MD – machine direction; CMD – cross-machine direction

**Additional information:**

Durability at least 25 years in natural soils of 4<pH<9 and temperature <25 °C.

Product covered by certificate of conformity of FPC nr 1488-CPR-0273/Z.

Nr of Declaration of Performance: DWU- GXP PLUS 0,5 -04

This material is resistant to typical chemicals, rust, fungi and bacteria.  
Does not contain any hazardous substances.