

Victaulic Strengthin 100 Grooved OSTP Standard Pipe Stock
To be designated OT 105

OSTP

Grade 4307

Spec: Base pipe prior to grooving EN 10217-7 Tc1 (W1/W2) NHT, Pickled, 100% EC tested

One Victaulic Stengthin 100 groove at each end of the pipe

After Grooving and cleaning of grooved area fitted with Plastic end caps both ends

OD	wall	Base Pipe Tols	length +/- 15mm	Std Pack No Tubes 2 layer	
60,3	2	D3/T3	6000	32 pcs	
76,1	2	D3/T3	6000	28 pcs	
88,9	2	D3/T3	6000	24 pcs	
114,3	2	D3/T3	6000	18 pcs	
139,7	2	D3/T3	6000	14 pcs	
168,3	2	D3/T3	6000	12 pcs	
219,1	3	D2/T3	6000	10 pcs	


Grade 4404

Spec: Base pipe prior to grooving EN 10217-7 Tc1 (W1/W2) NHT, Pickled, 100% EC tested

One Victaulic Stengthin 100 groove at each end of the pipe

After Grooving and cleaning of grooved area fitted with Plastic end caps both ends

OD	wall	Base Pipe Tols	length +/- 15mm	Std Pack No Tubes 2 layer	
60,3	2	D3/T3	6000	32 pcs	
76,1	2	D3/T3	6000	28 pcs	
88,9	2	D3/T3	6000	24 pcs	
114,3	2	D3/T3	6000	18 pcs	
139,7	2	D3/T3	6000	14 pcs	
168,3	2	D3/T3	6000	12 pcs	
219,1	3	D2/T3	6000	10 pcs	

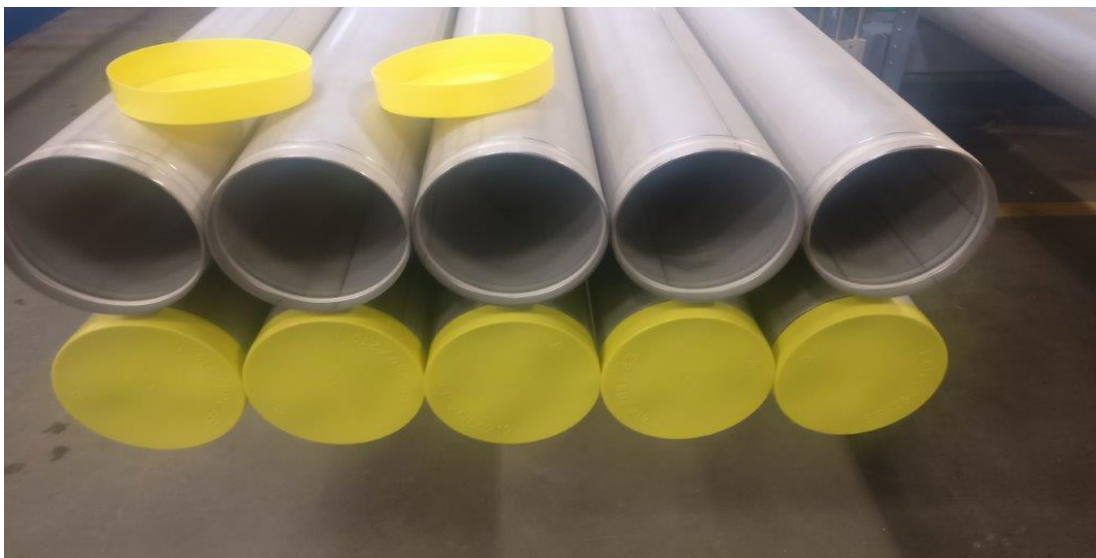

Victaulic Strengthin 100 Grooved OSTP Standard Pipe
To be designated OT 105 . Production against order

OSTP

Grade 4307

Spec: Base pipe prior to grooving EN 10217-7 Tc1 (W1/W2) NHT, Pickled, 100% EC tested

One Victaulic Stengthin 100 groove at each end of the pipe

After Grooving and cleaning of grooved area fitted with Plastic end caps both ends

OD	wall	Base Pipe Tols	length +/- 15mm	Std Pack No Tubes 2 layer	
60,3	1,6	D3/T3	3000	32	
60,3	2	D3/T3	3000	32	
76,1	1,6	D3/T3	3000	28	
76,1	2	D3/T3	3000	28	
88,9	1,6	D3/T3	3000	24	
88,9	2	D3/T3	3000	24	
114,3	1,6	D3/T3	3000	18	
114,3	2	D3/T3	3000	18	
139,7	2	D3/T3	3000	14	
168,3	2	D3/T3	3000	12	
219,1	3	D2/T3	3000	10	
273	3	D2/T3	3000	8	
323,9	3	D2/T3	3000	6	
60,3	1,6	D3/T3	6000	32	
76,1	1,6	D3/T3	6000	28	
88,9	1,6	D3/T3	6000	24	
114,3	1,6	D3/T3	6000	18	
273	3	D2/T3	6000	8	
323,9	3	D2/T3	6000	6	

Grade 4404

Spec: Base pipe prior to grooving EN 10217-7 Tc1 (W1/W2) NHT, Pickled, 100% EC tested

One Victaulic Stengthin 100 groove at each end of the pipe

After Grooving and cleaning of grooved area fitted with Plastic end caps both ends

OD	wall	Base Pipe Tols	length +/- 15mm	Std Pack No Tubes 2 layer	
60,3	1,6	D3/T3	3000	32	
60,3	2	D3/T3	3000	32	
76,1	1,6	D3/T3	3000	28	
76,1	2	D3/T3	3000	28	
88,9	1,6	D3/T3	3000	24	
88,9	2	D3/T3	3000	24	
114,3	1,6	D3/T3	3000	18	
114,3	2	D3/T3	3000	18	
139,7	2	D3/T3	3000	14	
168,3	2	D3/T3	3000	12	
219,1	3	D2/T3	3000	10	

273	3	D2/T3	3000	8
323,9	3	D2/T3	3000	6
60,3	1,6	D3/T3	6000	32
76,1	1,6	D3/T3	6000	28
88,9	1,6	D3/T3	6000	24
114,3	1,6	D3/T3	6000	18
273	3	D2/T3	6000	8
323,9	3	D2/T3	6000	6