

BIS Push-fit Saddle – Single (White)

(C 10 25)

for all pipes 8 - 35 mm


M6



Features and benefits

- one-part clamp
- connection thread M6 made of brass
- material: PP (polypropylene), white (according to RAL 9016)
- fire class B2
- no corrosion, recyclable, halogen free, resistant to UV and ageing
- temperature resistance from approx. -30 °C to approx. +90 °C (constant); short to approx. +110 °C

| Part No. | D<br>(mm) | D<br>(°) | DN | G  | B<br>(mm) | H<br>(mm) | h<br>(mm) | b<br>(mm) | Pack 1 | Pack 2 |
|----------|-----------|----------|----|----|-----------|-----------|-----------|-----------|--------|--------|
| 0853008  | 8         | -        | -  | M6 | 14        | 18        | 14        | 12        | 100    | 2.000  |
| 0853010  | 10        | 1/8      | 6  | M6 | 18        | 20        | 17        | 12        | 100    | 1.000  |
| 0853012  | 12        | -        | -  | M6 | 20        | 22        | 18        | 12        | 100    | 1.000  |
| 0853015  | 14 - 15   | -        | -  | M6 | 24        | 26        | 19        | 12        | 100    | 1.000  |
| 0853018  | 16 - 18   | 3/8      | 10 | M6 | 27        | 30        | 24        | 14        | 100    | 1.200  |
| 0853022  | 20 - 22   | 1/2      | 15 | M6 | 31        | 32        | 28        | 14        | 100    | 1.200  |
| 0853025  | 25        | 3/4      | 20 | M6 | 35        | 38        | 16        | 14        | 100    | 1.200  |
| 0853028  | 28        | 3/4      | 20 | M6 | 39        | 47        | 34        | 14        | 100    | 1.000  |
| 0853035  | 35        | -        | -  | M6 | 50        | 54        | 38        | 14        | 50     | 600    |

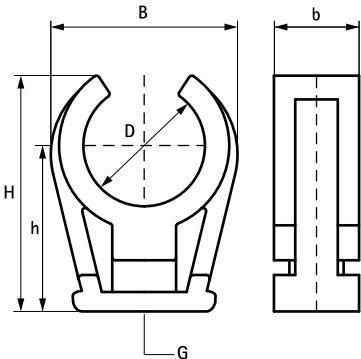

Alternative  
BIS starQuick® Clamp (White)