

## Y-FILTER, CF8M, FLENSSET, PN16, FIG. 2461

Y-strainer, CF8M, flanged, PN16, fig. 2461



### Dimensjoner

DN 50 – DN 65

### Trykkklasse

DN 50 – DN 65      PN16

### Temperaturområde

-30°C til +240°C

### Funksjon og konstruksjon

Y-filter med utskiftbar filterinnsats.

Standard maskevidde:

|        |        |
|--------|--------|
| DN 50: | 1,0 mm |
| DN 65: | 2,0 mm |

### Anvendelsesområde

Installeres i et rørsystem for å oppta urenheter som kan skade ventiler og pumper. Y-filter skal helst monteres i horisontal posisjon med filterutløpet vendt nedover, men kan også monteres vertikalt når væsken strømmer ovenfra og ned.

### Materialbeskrivelse

|            |                         |
|------------|-------------------------|
| 1. Hus     | Syrefast stål, CF8M     |
| 2. Lokk    | Syrefast stål, CF8M     |
| 3. Sil     | Syrefast stål, AISI 316 |
| 4. Bolt    | Syrefast stål, AISI 304 |
| 6. Plugg   | Syrefast stål, AISI 316 |
| 7. Pakning | PTFE                    |

### Anslutningsformer

Flenser PN16

Bygge lengder iht. EN 558 serie 1.

### Dimensions

DN 50 – DN 65

### Pressure rating

DN 50 – DN 65      PN16

### Temperature range

-30°C to +240°C

### Features

Y-strainer with replaceable filter cartridge

### Standard mesh:

|        |        |
|--------|--------|
| DN 50: | 1,0 mm |
| DN 65: | 2,0 mm |

### Range of application

Installed in pipe systems to avoid dirt and unwanted particles damaging valves and pumps. Y-strainer should be installed in a horizontal position, bonnet down, but can also be mounted in a vertical position when the flow direction is from up to down.


### Materials

|           |                           |
|-----------|---------------------------|
| 1. Body   | Stainless steel, CF8M     |
| 2. Cover  | Stainless steel, CF8M     |
| 3. Mesh   | Stainless steel, AISI 316 |
| 4. Bolt   | Stainless steel, AISI 304 |
| 5. Plug   | Stainless steel, AISI 316 |
| 6. Gasket | PTFE                      |

### Socket

Flanges acc. to PN16

Face to face acc. to EN 558 series 1.

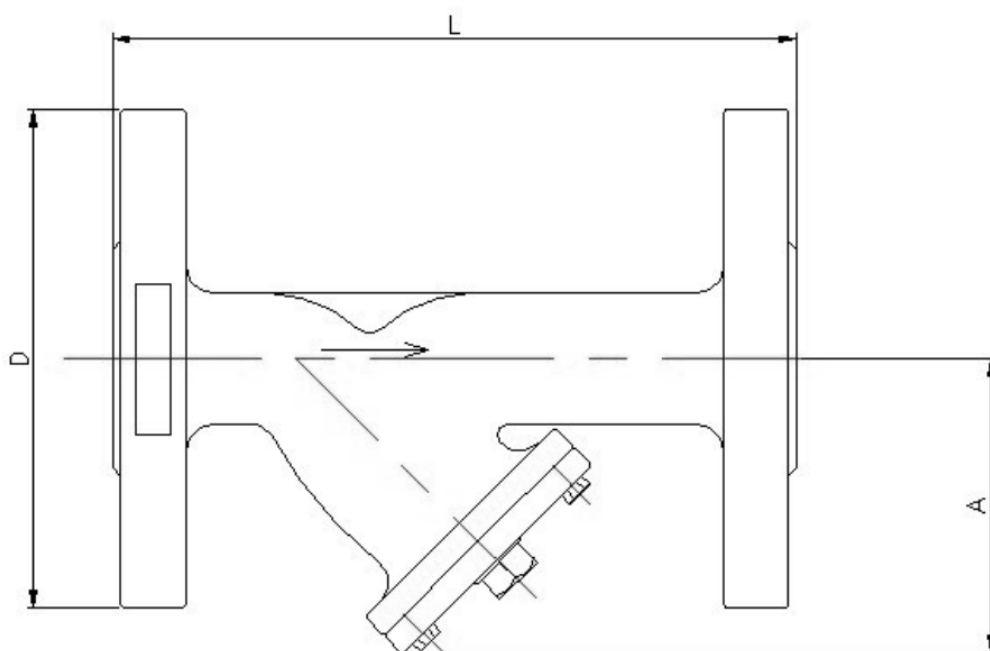

mm.

**MÅLTABELL OG ARTIKKELNUMMER/MEASUREMENTS AND PART NO.**

| DN | PN | A   | D   | L   | KG    | NRF nr./Part No. |
|----|----|-----|-----|-----|-------|------------------|
| 50 | 16 | 150 | 165 | 230 | 9,35  | 4015772          |
| 65 | 16 | 190 | 185 | 290 | 13,55 | 4015773          |