


BIS Industri U-rørbeslag

for stålør 21,5 - 273,0 mm


(B 15 05)

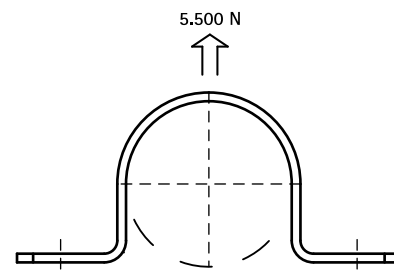

Funktioner og fordele

- sammenhængende u-beslag
- varmforzinket
- materiale: stål

Art.nr.	D (mm)	D (°)	DN (mm)	B (mm)	H (mm)	b x s (mm)	d1 (mm)	k (mm)	Fa,z (N)	Pakke 1
460 8 021	21,5	1/2	15	82	24	25 x 2,5	Ø 9	52	5.500	50
460 8 027	26,9	3/4	20	88	30	25 x 2,5	Ø 9	58	5.500	50
460 8 033	33,7	1	25	94	36	25 x 2,5	Ø 9	64	5.500	50
460 8 042	42,4	1 1/4	32	103	45	25 x 2,5	Ø 9	73	5.500	50
460 8 048	48,3	1 1/2	40	109	51	25 x 2,5	Ø 9	79	5.500	50
460 8 060	60,3	2	50	120	63	25 x 2,5	Ø 9	90	5.500	50
460 8 077	76,1	2 1/2	65	137	80	25 x 2,5	Ø 9	107	5.500	50
460 8 089	88,9	3	80	149	92	25 x 2,5	Ø 9	119	5.500	50
460 8 114	114,3	4	100	180	118	30 x 4,0	Ø 11	150	5.500	50
460 8 140	139,7	5	125	206	144	30 x 4,0	Ø 11	176	5.500	25
460 8 168	168,3	6	150	234	172	40 x 4,0	Ø 11	204	5.500	20
460 8 273	273,0	10	250	363	278	40 x 5,0	15 x 10,5	333	5.500	20

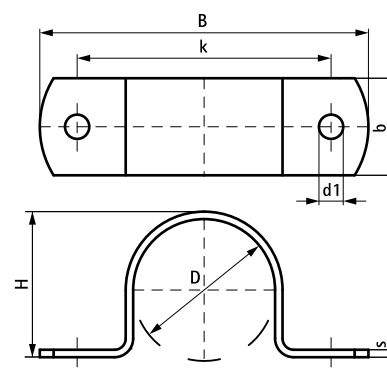

Alternativ
BIS Rørbærer (VG)