


Stengbar tilbakeslagsventil, fig. 52.559.SD

Screw down non-return, fig. 52.559.SD

Valvula cu trecere directa, cu ventil, cu retinere, cu prindere prin flanse, fig. 52.559.SD

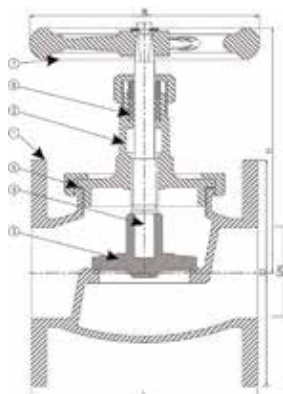

Dimensjoner

DN 15 - DN 100

Trykkklasse

PN 16

Funksjon og konstruksjon

Rettløps tilbakeslagsventil med plantetting. Gjenget overdel med låsemutter

Alternativ med fjær

Anvendelsesområde

Sjøvann, vann og lavtrykksdamp.

Materialbeskrivelse

1. Hus	Bronse CC491K (RG5)
2. Overdel	Bronse CC491K (RG5)
3. Kjegle	Bronse CC491K (RG5)
4. Spindel	Messing CW710R
5. Overdel pakning	PTFE
6. Bokspakning	Grafit
7. Ratt	Støpejern GG 25

Anslutningsform

Flenser boret iht. DIN standard PN 16

Kan også leveres i ANSI og JIS standard

Dimensions

DN 15 - DN 100

Pressure rating

PN 16

Features

Screw down non- return globe valves with bronze disc and seat, straight pattern, screwed and secured bonnet. Inside screwed stem and rising hand wheel
Option with spring

Range of applications

Sea water, water and low pressure steam

Materials

1. Body	Bronze CC491K (RG5)
2. Bonnet	Bronze CC491K (RG5)
3. Disc	Bronze CC491K (RG5)
4. Stem	Brass CW710R
5. Bonnet gasket	PTFE
6. Gland packing	Graphite
7. Hand wheel	Cast iron GG 25

Socket

Flanges acc. to DIN standard PN 16

Also available acc. to ANSI and JIS standard

HS Code 8481.3093

HS Code Int. 8481.30

MÅLTABELL OG ARTIKKELNUMMER/MEASUREMENTS AND PART NO.

DN	D	L	H	R	Arb. trykk i bar/MAWP	KG	NRF nr. Part No.
					120 °C		
15	95	70	102	63	16	1.5	5708108
20	105	80	117	80	16	2.3	5708109
25	115	90	124	80	16	3.0	5708111
32	140	105	130	90	16	5.0	5708112
40	150	120	147	100	16	6.5	5708113
50	165	140	172	125	16	8.0	5708114
65	185	180	230	160	16	13	5708115
80	200	200	250	200	16	17	5708116
100	220	230	250	200	16	21	5708117