




Patentband[®] - Steelband

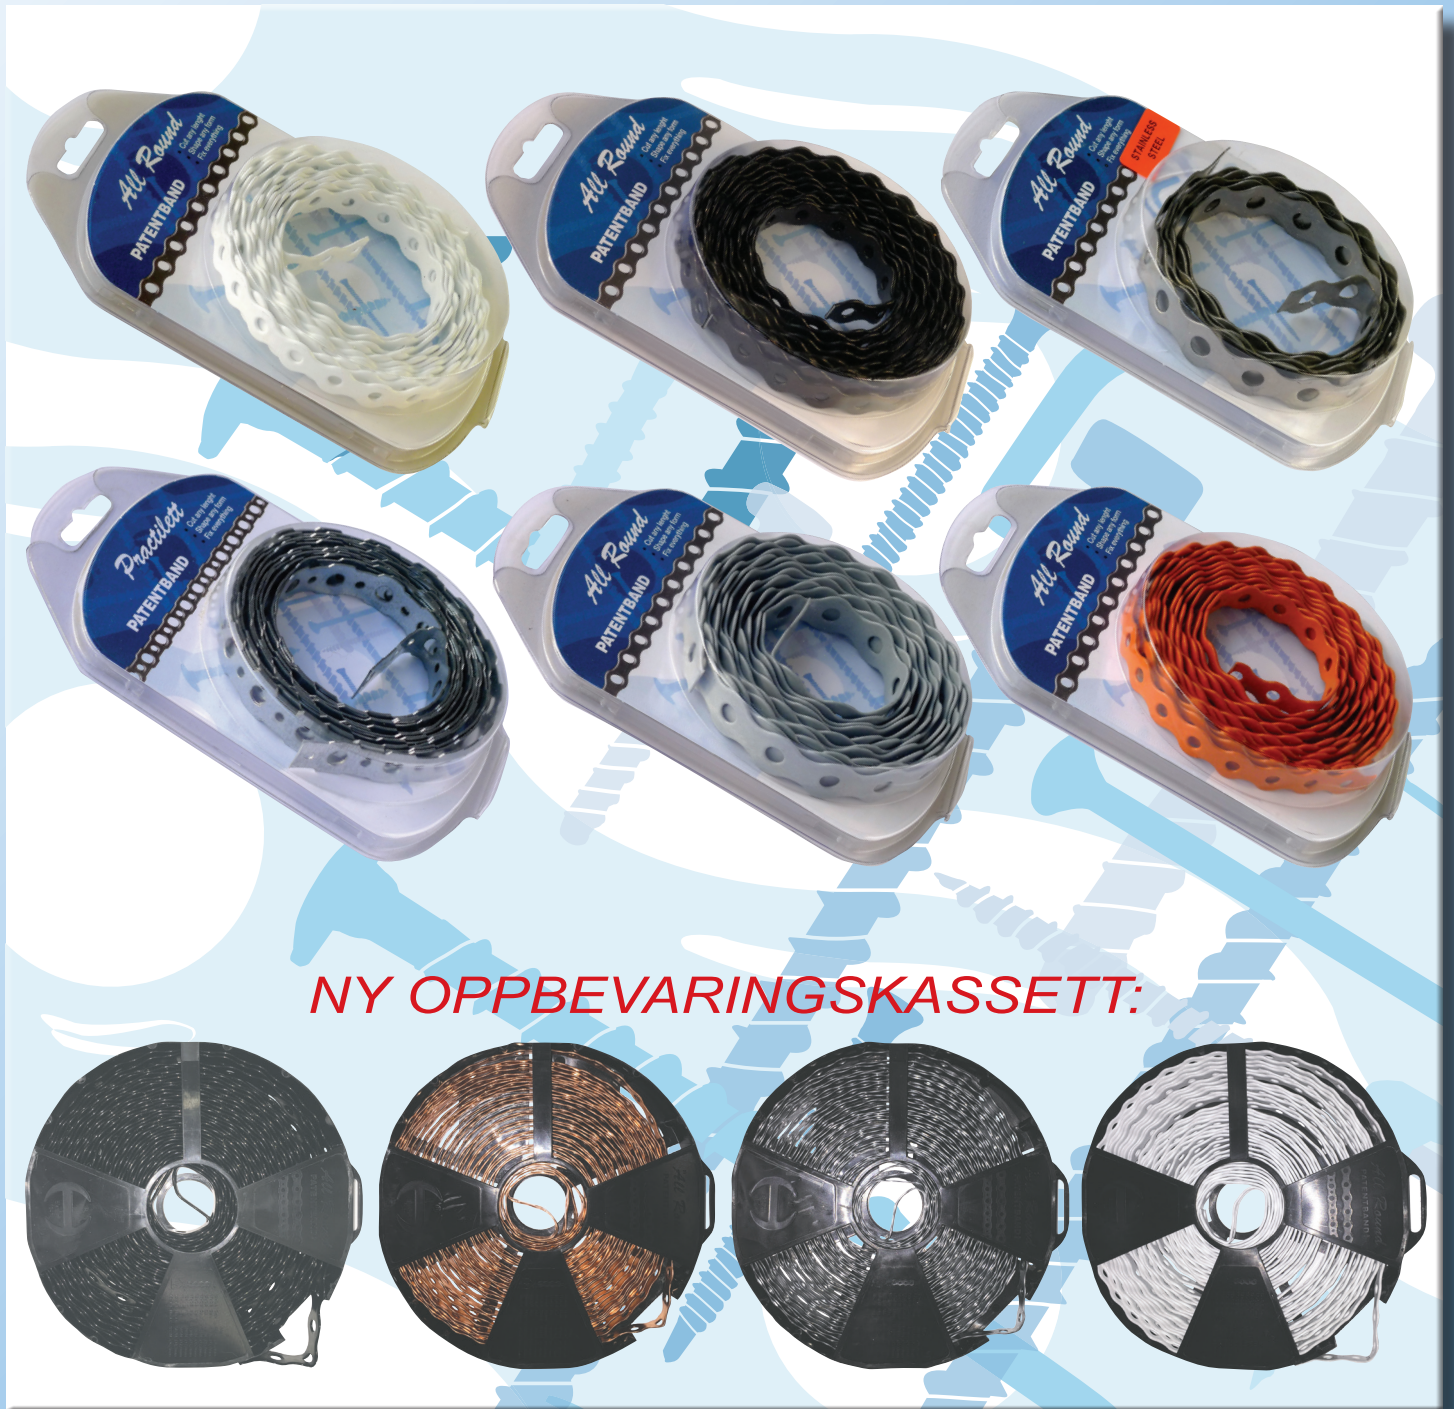

NY OPPBEVARINGSKASSETT:

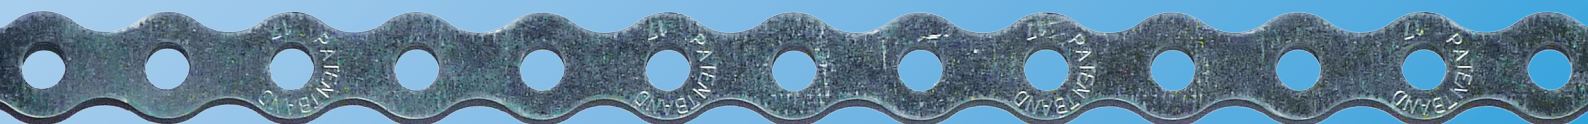

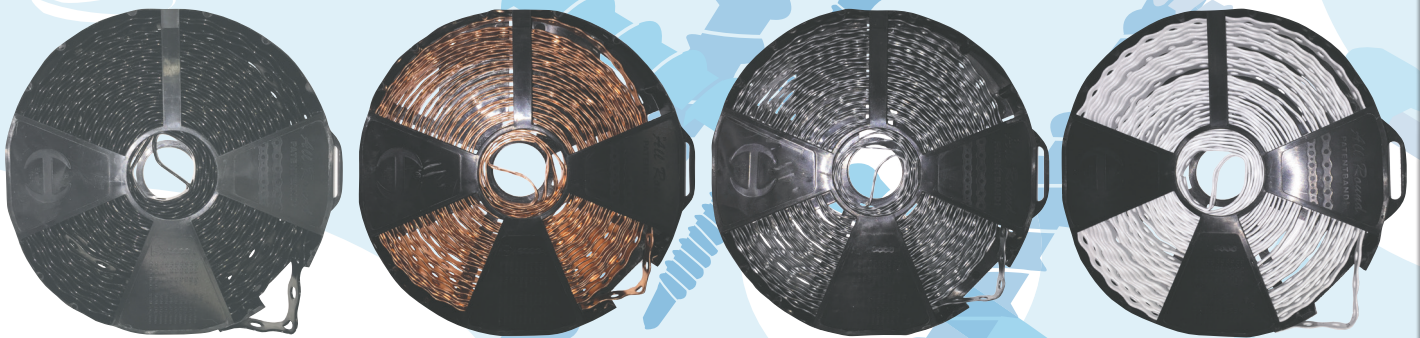

Plastic coated
steelband in
3 different colours
as standard.

Other colours on request.



ALL ROUND 12 mm
Hole Ø 5,0 mm

Plastic coated
Hole Ø 4,3 mm

Color
White - Grey
Black - Green - Red



ALL ROUND 17 mm
Hole Ø 7,0 mm

Plastic coated
Hole Ø 6,3 mm

Color
White - Grey
Black - Green - Red



ALL ROUND 26 mm
Hole Ø 8,6 mm

Plastic coated
Hole Ø 7,6 mm

Color
White - Grey
Black



PRACTILET 16 mm
Hole Ø 6,4 mm and 3,3 mm


Plastic coated
Hole Ø 5,7 mm and 2,4 mm

Color
White - Grey
Black






Type	Dimension (mm)	Material (mm)	Max load		Roll (m)	Roll/Carton (pcs)	DIY pack (m)	DIY pack/ Carton (pcs)	
			(N)	(kp)					
AR 12	12 X 0,8	Galvanized	582	59	10	20	3,0	30	
ALL ROUND	12 X 0,9	Copper	424	43	10	20	1,5	15	
	12 X 0,8	AISI 316L	1 036	106	10	20	1,5	15	
	12 X 1,0	Aluminium	393	40	10	20	-	-	
	* Galv. 12 x 0,8	*13 x 1,4	White	582	59	10	20	3,0	10
* Galv. 12 x 0,8	*13 x 1,4	Grey	582	59	10	20	3,0	10	
* Galv. 12 x 0,8	*13 x 1,4	Black	582	59	10	20	3,0	10	
* Galv. 12 x 0,8	*13 x 1,4	Green	582	59	10	20	3,0	10	
* Galv. 12 x 0,8	*13 x 1,4	Red	582	59	10	20	3,0	10	
AR 17	17 X 0,8	Galvanized	815	84	10	20	3,0	30	
ALL ROUND	17 X 0,9	Copper	644	66	10	20	1,5	15	
	17 X 0,8	AISI 316L	1 510	154	10	20	1,5	15	
	17 X 1,0	Aluminium	585	60	10	20	-	-	
	* Galv. 17 x 0,8	*18 x 1,4	White	815	84	10	20	3,0	30
* Galv. 17 x 0,8	*18 x 1,4	Grey	815	84	10	20	3,0	30	
* Galv. 17 x 0,8	*18 x 1,4	Black	815	84	10	20	3,0	30	
* Galv. 17 x 0,8	*18 x 1,4	Green	815	84	10	20	3,0	30	
* Galv. 17 x 0,8	*18 x 1,4	Red	815	84	10	20	3,0	30	
AR 26	26 X 1,0	Galvanized	1 684	183	10	10	-	-	
ALL ROUND	26 X 1,2	Copper	1 484	151	10	10	-	-	
	26 X 1,0	AISI 316L	2 869	292	10	10	-	-	
	* Galv. 26 x 1,0	*27 X 1,6	White	1 684	183	10	10	-	-
	* Galv. 26 x 1,0	*27 X 1,6	Grey	1 684	183	10	10	-	-
* Galv. 26 x 1,0	*27 X 1,6	Black	1 684	183	10	10	-	-	
* Galv. 26 x 1,0	*27 X 1,6	Green	1 684	183	10	10	-	-	
* Galv. 26 x 1,0	*27 X 1,6	Red	1 684	183	10	10	-	-	
PR 16	16 X 0,8	Galvanized	880	88	10	20	3,0	30	
PRACTILETT									
* Galv. 16 x 0,8	*17 x 1,4	White	880	88	10	20	3,0	30	
* Galv. 16 x 0,8	*17 x 1,4	Grey	880	88	10	20	3,0	30	
* Galv. 16 x 0,8	*17 x 1,4	Black	880	88	10	20	3,0	30	
* Galv. 16 x 0,8	*17 x 1,4	Green	880	88	10	20	3,0	30	
* Galv. 16 x 0,8	*17 x 1,4	Red	880	88	10	20	3,0	30	

Type	Material	Euronorm
GALVANIZED	Cold-rolled pre-galvanized steel	NS-EN 10327
COPPER	Semi-hard, purity, CU (+AG) min. 99,8 %	NS-EN 1652 (DIN 1787)
STAINLESS STEEL	Quality A4	EN 1.4404
ALUMINIUM	Glowed Aluminium	EN AW 5754 H111
PLASTIC COATED	Pre-galvanized steel strap, coated with termo-plastic material which is resistant to: Seawater, salty liquids, acids, animal and vegetable fat, grease, petroleum products, fungus and mould. The covering is UV resistant and have a good electrical insulating characteristics. Temperature up to max 100 °C for a short periode. Max workingtemperature is 50 °C.	

* Dimension before, and after coating.

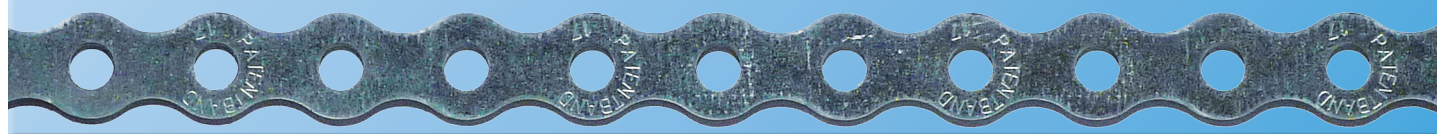

**We get things in the right position,
and make them stay there!**

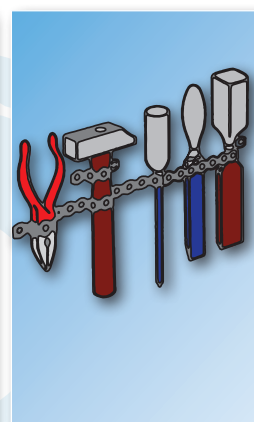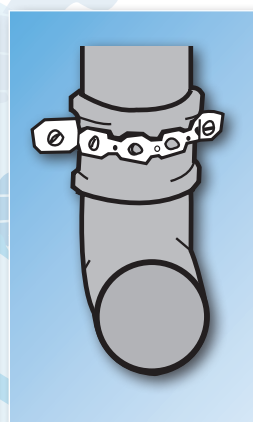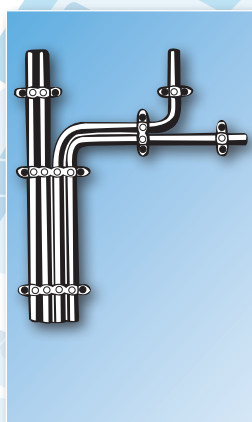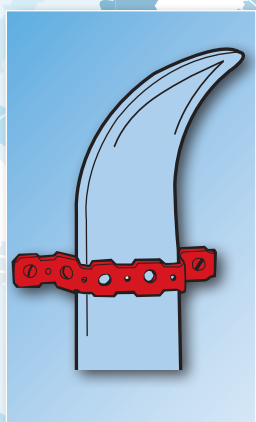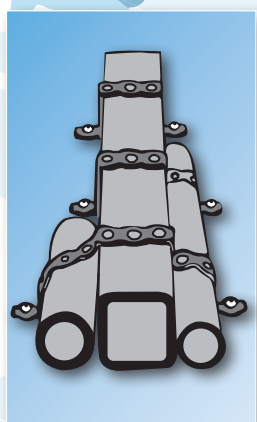

**For more info
please contact:**

Christiania Byggteknikk AS
Visiting address / post address:
Deliveien 5 - 1540 Vestby
Tel.: +47 69 87 77 22

E-mail: post@cbtek.no - Web: www.cbtek.no