

# ENVIRONMENTAL PRODUCT DECLARATION

**In accordance with ISO 14025:2006  
and EN 15804:2012+A2:2019/AC:2021 for:**

## MAPEPOXY L



Publisher: The Norwegian EPD Foundation  
Registration number: NEPD-5474-4781-EN

"An EPD should provide current information and may be updated if conditions change. The stated validity is, therefore, subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).

Programme:  
**The International  
EPD® System;**  
[www.environdec.com](http://www.environdec.com)

Programme  
operator:  
**EPD International AB**

EPD registration  
number:  
**S-P-11309**

Publication  
date:  
**2023-11-23**

Valid until:  
**2028-11-22**

Geographical  
scope:  
**Global**




## 1. COMPANY DESCRIPTION / GOAL & SCOPE

Founded in 1937 in Milan, Italy, Mapei produces adhesives and complementary products for laying all types of floor, wall and coating materials, and also specializes in other chemical products used in the building industry, such as waterproofing products, specialty mortars, admixtures for concrete, cement additives, products for underground constructions and for the restoration of concrete and historical buildings.

There are currently 100 subsidiaries in the Mapei Group, with a total of 86 production facilities located around the world in 36 different countries and in 5 different continents. Mapei also has 32 central laboratories. Most locations are ISO 9001 and ISO 14001 or EMAS-certified.

Mapei invests 12% in its company's total work-force and 5% of its turnover in Research & Development; in particular, 70% of its R&D efforts are directed to develop eco-sustainable and environmentally friendly products, which give important contribution to all major

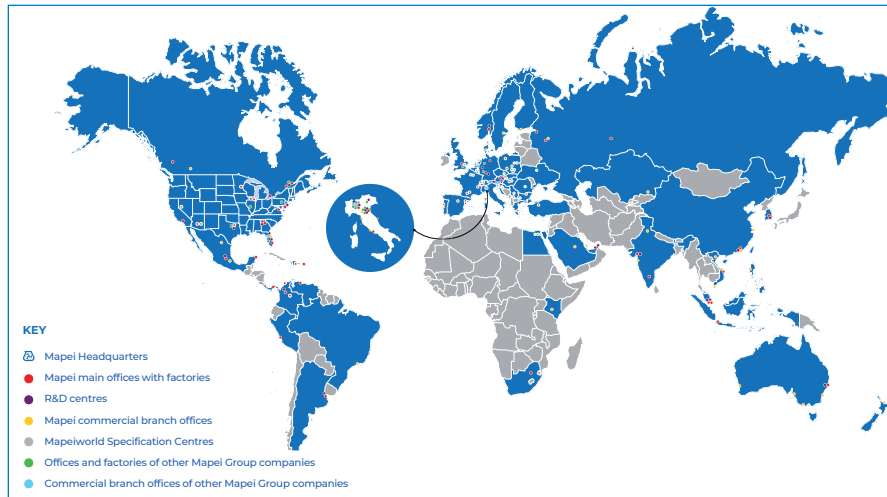

**LEED V4.1** is the latest version of Leadership in Environmental and Energy Design, an American protocol that enables buildings to be certified as eco-sustainable according to parameters and credits described in the most widely adopted green building criteria in the world. Issued by the GBC US, it is mandatory for all LEED projects registered after October 2016.

Numerous changes have been made to the previous version: Mapei products play a part in obtaining important credits thanks to their EPD's (type III environmental declarations) and their products with very low emission of VOC.

Launched in the UK in 1990, **BREEAM** (BRE Environmental Assessment Method) is a protocol for sustainable building practices adopted mainly in the United Kingdom and in Scandinavian countries with the version **BREEAM NOR**.

By adopting this protocol, thanks to their EPD's and very low emission of VOC, Mapei products help towards obtaining relative credits.

green rating systems for eco-sustainable buildings such as LEED and BREEAM.

Furthermore, Mapei has developed a sales and technical service network with offices all over the world and offers an efficient Technical Assistance Service that is valued by architects, engineers, contractors and owners.

Mapei Nordic production site is located in Sagstua, Norway. The production site consists of 5 factories: Two factories for powder-based products, two factories for liquid admixtures and one factory for thermosetting plastic-based products. The total size of the buildings is 24.000 sqm. The energy in these factories is

provided from water electricity, geothermal heating and remaining approximately 10 % heated by bio-oil.

Mapei Nordic focuses both on energy and on logistic optimisation, as for example the systematic Lean based improvement work. With 60 – 80 trailers per day, and 600 transport lines, requires Mapei to work actively on optimizing our logistic process.

The goal of the study is to provide necessary data and documentation to produce an EPD according to the requirements of PCR Environdec (Version 1.3.1, 2023-07-08) under EN 15804:2012+A2:2019/AC:2021 and to have more comprehension about the environmental impacts related to **Mapepoxy L** manufactured in Mapei AS located in Sagstua (NO), including packaging of the finished products.

Target audiences of the study are customers and other parties with an interest in the environmental impacts of **Mapepoxy L**. This analysis shall not support comparative assertions intended to be disclosed to the public.

## 2. PRODUCT DESCRIPTION

**Mapepoxy L (A+B)** is a two-component epoxy adhesive based on a prefilled epoxy resin and an accelerated polyamine. Mapepoxy L does not contain benzyl alcohol or other plasticizers.

**Mapepoxy L** is used as force transmission adhesive for:

- fresh (unhardened) concrete to hardened concrete
- hardened concrete to hardened concrete
- steel to hardened concrete
- steel to steel

**Mapepoxy L** is also suitable for anchoring of bolts in drilled holes, and as protective coating on concrete.

The product complies with the principles defined in EN 1504-9 standards and the requirements of EN 1504-4.

**Mapepoxy L** is a low-emitting product according to Finnish M1 classification.

**Mapepoxy L** is available in:

- 1.25 kg set: Component A = 1,1 kg, component B = 0,15 kg.
- 4.5 kg set: Component A = 4,0 kg, component B = 0,5 kg.
- 9 kg set: Component A = 8,0 kg, component B = 1,0 kg.

For more information about the product see the TDS (Technical Data Sheet) on Mapei AS website ([www.mapei.com/NO](http://www.mapei.com/NO)).

### 3. CONTENT DECLARATION

The main components and ancillary materials of the product included in this EPD are the following:

Table 1: Composition referred to 1 kg of finished product (A+B) packaged in 9 kg set

Materials	Percentage (%) by mass	Post-consumer recycled material weight-%	Biogenic Material, weight-% and kgC/kg
Filler	< 60	0	0 resp. 0
Resin Component	< 35	0	0 resp. 0
Reactive diluting agent	< 15	0	0 resp. 0
Amines	<20	0	0 resp. 0
Additives	<5	0	0 resp. 0
Packaging Materials	Weight-% (versus the product)		Weight biogenic carbon, kg C/kg
Metal (bucket/can)	< 15%		0
LDPE (wrap)	< 1%		0
Wood (pallet)	< 5%		0,43

The product does not contain a concentration higher than 0,1% (by unit weight) of either carcinogenic substances or substances of very high concern (SVHC) on the REACH Candidate List published by the European Chemicals Agency.

### 4. DECLARED UNIT AND REFERENCE SERVICE LIFE

**The declared unit is 1 kg of finished product with packaging.**

Due to the selected system boundary, the reference service life of the product is not specified.

## 5. SYSTEM BOUNDARIES AND ADDITIONAL TECHNICAL INFORMATION

The approach is “cradle to gate” (A1–A3) with modules C1–C4 and module D and optional modules (A1–A3 + A4 – A5 + C + D):

- A1, A2, A3 (Product stage): extraction and processing of raw materials and packaging (A1), transportation up to the factory gate (A2), manufacturing of the finished product (A3).
- A4 – A5 (Construction process stage): transport of the finished product to final customers and installation into the building.
- C1, C2, C3, C4 (End of Life stage): With a collection rate of 100% as C&D waste, the transports are carried out by lorry over 100 km (C2). A recycling ratio (C3) of 70% is considered in accordance with the European Directive 2008/98/CE. The remaining 30% is landfilled (C4).
- D (Resource recovery stage): reuse, recovery and/or recycling potentials, expressed as net impacts and benefit. This module contains the credits from the incineration of a fraction of packaging waste.

Table 2: System boundaries

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Modules declared	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X	
Geography	NO	NO, EU	NO	EU	EU	-	-	-	-	-	-	-	EU	EU	EU	EU	EU	
Specific data	> 90%					-	-	-	-	-	-	-	-	-	-	-	-	
Variation – products	0%					-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%					-	-	-	-	-	-	-	-	-	-	-	-	-

MND: Module Not Declare

A brief description of production process is the following:

The production process starts from raw materials, that are purchased from external and intercompany suppliers and stored in the plant. Bulk raw materials are stored in specific tanks and added in the production mixer, according to the formula of the product. Other raw materials, supplied in bags, tanks, drums and cans, are stored in the warehouse and added manually in the mixer. The production is a discontinuous process, in which all the components are mechanically mixed in batches. The semi-finished product is then filled in IBC, drums, buckets or cans, put on wooden pallets and stored in the finished products warehouse. The quality of final products is controlled before the sale.

Figure 1: production process

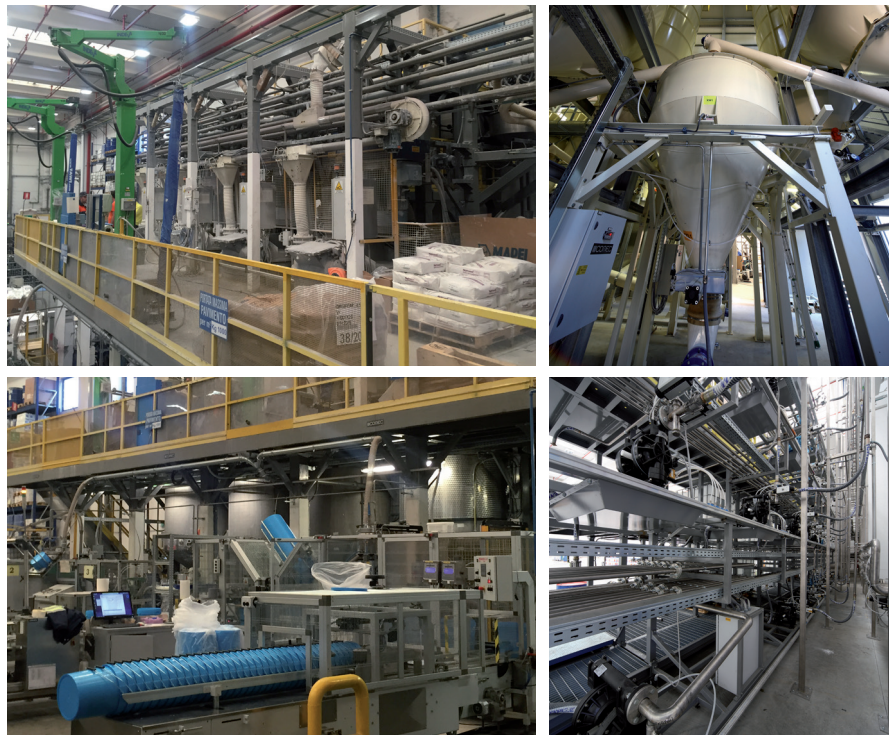


Table 3: Transport to the building site (A4)

Scenario information	Value	Unit
Means of transport: truck-trailer euro 6, gross weight 34-40 t, payload capacity 27 t		
Diesel consumption	0,002	l/100km
Transport distance	1000	km
Capacity utilisation (including empty runs)	85	%
Gross density of products transported	~ 1500	kg/m <sup>3</sup>
Capacity utilisation volume factor	1	-

Table 4: Installation into the building (A5)

Scenario information	Value	Unit
Ancillary materials for installation	0	kg
Water use	0	m <sup>3</sup>
Other resources use	0	kg
Electricity (Norwegian grid mix)	0,03	MJ
Waste materials on building site before waste processing, generated by the product's installation (specified by type)	0,0545 (wood) 0,00102 (plastics) 0,157 (metal)	kg
Output materials (specified by type) as result of waste processing at the building site e.g. of collection for recycling, for energy recovery, disposal (specified by route)	0,029 (energy recovery) 0,182 (recycle)	kg
Direct emission to ambient air, soil and water	0	kg

## 6. CUT-OFF RULES AND ALLOCATION

Criteria for the exclusion of inputs and outputs (cut-off rules) in the LCA, information modules and any additional information are intended to support an efficient calculation procedure. They are not applied in order to hide data. Cut-off criteria, where applied, are described in Table 5.

Table 5: Cut-off criteria

Process excluded from study	Cut-off criteria	Quantified contribution from process
A3: Production (auxiliary materials)	Less than $10^{-5}$ kg/kg of finished product	Sensitivity study demonstrates a relative contribution lower than 0,5%

For the allocation procedure and principles consider the following table (Table 6):

Table 6: Allocation procedure and principles

Module	Allocation Principle
A1	All data are referred to 1 kg of product A1: electricity is allocated to the specific production line
A3	All data are referred to 1 kg of packaged product A3-wastes: all data are allocated to the whole production plant

## 7. ENVIRONMENTAL PERFORMANCE AND INTERPRETATION



**GWP**

### Climate change

GWPTotal - Global Warming Potential refers to the emission/presence of GHGs (greenhouse gases) in the atmosphere (mainly CO<sub>2</sub>, N<sub>2</sub>O, CH<sub>4</sub>) which contribute to the increase in the temperature of the planet.

GWP-total considers:

- GWP-fossil
- GWP-biogenic
- GWP-luluc (land use and land use change)



**ODP**

### Ozone Depletion

Ozone Depletion Potential refers to the degradation of the stratospheric layer of the ozone involved in blocking the UV component of sunrays. Depletion is due to particularly reactive components that originate from chlorofluorocarbon (CFC) or chlorofluoromethane (CFM).



**AP**

### Acidification

Acidification Potential refers to the emission of specific acidifying substances (i.e. NO<sub>x</sub>, SO<sub>x</sub>) in the air. These substances decrease the pH of the rainfall with predictable damages to the ecosystem.



**EP**

### Eutrophication

Eutrophication Potential refers to the nutrient enrichment, which determines unbalance in ecosystems and causes the death of the fauna and decreased biodiversity in flora.

It considers:

- EP-freshwater: aquatic freshwater
- EP-marine: aquatic marine
- EP-terrestrial



**POCP**

### Photochemical ozone formation

The Photochemical Ozone Creation Potential is the ozone formation in low atmosphere. This is quite common in the cities where a great amount of pollutants (like VOC and NO<sub>x</sub>) are emitted every day (industrial emissions and vehicles). It is mainly diffused during the summertime.



**ADP  
minerals&metals**

### Depletion of abiotic resources – minerals and metals

Abiotic Depletion Potential elements refers to the depletion of the mineral resources.



**ADP - fossil**

### Depletion of abiotic resources – fossil fuel

Abiotic Depletion Potential fossil fuel refers to the depletion of the fossil fuel resources.



**WDP**

### Water use

It expresses the potential deprivation of water, that consists in not having the water needs satisfied.



The following tables show the environmental impacts for the products considered according to the requirements of EN15804:2012+A2:2019/AC:2021. The results are referred to the declared unit (see § 4). The additional environmental indicators are not declared. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. We discourage the use of the outcomes from modules A1-A3 without considering the results obtained from modules C.

NOTE: in the whole document, the comma “ , ” is the decimal separator, while the point “ . ” is the thousands separator.

## MAPEPOXY L (A+B)

(1 kg of product with packaging)

Table 7: Mapepoxy L (A+B): Potential environmental impact – mandatory indicators according to EN 15804 referred to 1 kg of product with packaging.

Indicator	Unit	A1	A2	A3	A1 – A3	A4	A5	C1	C2	C3	C4	D
<b>GWP<sub>TOTAL</sub></b>	(kg CO <sub>2</sub> eq.)	2,86E+00	6,21E-02	2,38E-01	3,17E+00	7,45E-02	1,03E-01	1,56E-03	8,08E-03	1,78E-03	4,47E-03	-9,18E-03
GWP <sub>FOSSIL</sub>	(kg CO <sub>2</sub> eq.)	2,85E+00	5,89E-02	2,92E-01	3,20E+00	7,06E-02	4,30E-02	1,55E-03	7,65E-03	1,76E-03	4,44E-03	-9,14E-03
GWP <sub>BIOGENIC</sub>	(kg CO <sub>2</sub> eq.)	1,15E-02	2,71E-03	-5,40E-02	-3,98E-02	3,32E-03	6,04E-02	1,35E-05	3,59E-04	5,95E-06	1,25E-05	-3,98E-05
GWP <sub>LULUC</sub>	(kg CO <sub>2</sub> eq.)	1,78E-03	5,32E-04	1,03E-04	2,41E-03	6,51E-04	2,70E-05	1,69E-07	7,04E-05	1,35E-05	1,40E-05	-5,75E-07
ODP	(kg CFC 11 eq.)	2,91E-07	1,03E-14	5,29E-11	2,91E-07	9,14E-15	5,48E-14	2,86E-14	9,89E-16	3,00E-15	1,15E-14	-6,66E-14
AP	(mol H <sup>+</sup> eq.)	9,79E-03	2,32E-04	4,36E-04	1,05E-02	8,67E-05	2,87E-05	3,30E-06	9,63E-06	9,35E-06	3,20E-05	-1,10E-05
EP <sub>FRESHWATER</sub>	(kg P eq.)	5,53E-04	2,11E-07	3,08E-06	5,57E-04	2,57E-07	2,37E-08	5,80E-09	2,78E-08	6,10E-09	9,08E-09	-1,38E-08
EP <sub>MARINE</sub>	(kg N eq.)	3,14E-03	9,83E-05	1,48E-04	3,38E-03	2,89E-05	1,02E-05	7,90E-07	3,24E-06	4,29E-06	8,26E-06	-3,27E-06
EP <sub>TERRESTRIAL</sub>	(mol N eq.)	2,18E-02	1,10E-03	1,58E-03	2,44E-02	3,48E-04	1,15E-04	8,26E-06	3,91E-05	4,74E-05	9,09E-05	-3,51E-05
POCP	(kg NMVOC eq.)	7,88E-03	2,02E-04	3,82E-04	8,47E-03	7,45E-05	2,65E-05	2,11E-06	8,27E-06	1,16E-05	2,49E-05	-9,14E-06
ADP <sub>MINERALS&amp;METALS</sub> *	(kg Sb eq.)	1,75E-05	3,84E-09	6,16E-08	1,75E-05	4,66E-09	6,44E-10	2,39E-10	5,04E-10	1,92E-09	2,08E-10	-6,15E-10
ADP <sub>FOSSIL</sub> *	(MJ)	5,87E+01	7,97E-01	4,31E+00	6,38E+01	9,57E-01	1,11E-01	3,25E-02	1,04E-01	3,53E-02	6,00E-02	-1,67E-01
WDP*	(m <sup>3</sup> world eq.)	1,31E+00	7,29E-04	1,06E-02	1,32E+00	8,49E-04	5,30E-03	3,40E-04	9,19E-05	3,48E-04	4,95E-04	-7,97E-04

**GWP<sub>TOTAL</sub>**: Global Warming Potential total; **GWP<sub>FOSSIL</sub>**: Global Warming Potential fossil fuels; **GWP<sub>BIOGENIC</sub>**: Global Warming Potential biogenic; **GWP<sub>LULUC</sub>**: Global Warming Potential land use and land use change; **ODP**: Depletion Potential of the stratospheric Ozone layer; **AP**: Acidification Potential; **EP<sub>FRESHWATER</sub>**: Eutrophication Potential, freshwater; **EP<sub>MARINE</sub>**: Eutrophication Potential, marine; **EP<sub>TERRESTRIAL</sub>**: Eutrophication Potential, terrestrial; **POCP**: Formation potential of tropospheric ozone; **ADP<sub>MINERALS&METALS</sub>**: Abiotic Depletion Potential for non-fossil resources; **ADP<sub>FOSSIL</sub>**: Abiotic Depletion Potential for fossil resources; **WDP**: Water Deprivation Potential.

\*the results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is a limited experience with the indicator

Table 8: Mapepoxy L (A+B): Potential environmental impact – additional mandatory and voluntary indicators referred to 1 kg of product with packaging

Indicator	Unit	A1	A2	A3	A1 – A3	A4	A5	C1	C2	C3	C4	D
<b>GWP-GHG</b>	(kg CO <sub>2</sub> eq.)	2,85E+00	5,96E-02	2,95E-01	3,21E+00	7,14E-02	4,31E-02	1,56E-03	7,74E-03	1,78E-03	4,47E-03	-9,18E-03

**GWP-GHG**: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 9: Mapepoxy L (A+B): Use of resources referred to 1 kg of product with packaging

Indicator	Unit	A1	A2	A3	A1 – A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	3,43E+00	5,89E-02	2,10E+00	5,59E+00	6,97E-02	1,07E+00	1,94E-02	7,54E-03	3,28E-03	9,78E-03	-4,54E-02
PERM	MJ	0,00E+00	0,00E+00	1,03E+00	1,03E+00	0,00E+00	-1,03E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	3,43E+00	5,89E-02	3,13E+00	6,62E+00	6,97E-02	3,93E-02	1,94E-02	7,54E-03	3,28E-03	9,78E-03	-4,54E-02
PENRE	MJ	5,87E+01	8,00E-01	4,20E+00	6,37E+01	9,61E-01	2,23E-01	3,25E-02	1,04E-01	3,53E-02	6,01E-02	-1,67E-01
PENRM	MJ	0,00E+00	0,00E+00	1,13E-01	1,13E-01	0,00E+00	-1,13E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	5,87E+01	8,00E-01	4,31E+00	6,38E+01	9,61E-01	1,11E-01	3,25E-02	1,04E-01	3,53E-02	6,01E-02	-1,67E-01
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m <sup>3</sup>	3,15E-02	6,39E-05	1,00E-03	3,26E-02	7,63E-05	1,40E-04	1,56E-05	8,26E-06	1,01E-05	1,52E-05	-3,67E-05

**PERE:** Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM:** Use of renewable primary energy resources used as raw materials; **PERT:** Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE:** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM:** Use of non-renewable primary energy resources used as raw materials; **PENRT:** Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM:** Use of secondary material; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of fresh water.

Table 10: Mapepoxy L (A+B): Waste production and output flows referred to 1 kg of product with packaging

Indicator	Unit	A1	A2	A3	A1 – A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	4,10E-05	2,22E-12	4,84E-02	4,85E-02	2,98E-12	-3,48E-12	-2,54E-12	3,22E-13	-9,15E-14	1,31E-12	-1,03E-11
NHWD	kg	1,96E-02	1,23E-04	3,19E-03	2,29E-02	1,46E-04	5,31E-03	2,39E-05	1,59E-05	9,29E-06	3,00E-01	-7,96E-05
RWD	kg	4,11E-04	1,99E-06	2,61E-04	6,73E-04	1,80E-06	9,46E-06	5,16E-06	1,95E-07	4,74E-07	6,85E-07	-1,20E-05
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	2,52E-03	2,52E-03	0,00E+00	2,66E-02	0,00E+00	0,00E+00	7,00E-01	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,98E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,18E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,85E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

**HWD:** Hazardous waste disposed; **NHWD:** Non-Hazardous waste disposed; **RWD:** Radioactive waste disposed

Table 11: Mapepoxy L (A+B): Information on biogenic carbon content at the factory gate referred to 1 kg of product with packaging





Biogenic Carbon Content	Unit	Quantity
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in packaging	kg C	2,32E-02

Tables from 7 to 11 show absolute results for all the environmental categories considered.

The main contribution to the environmental impact categories in the product life cycle comes from extraction and processing of raw materials (**module A1**). Its relative contribution is over 80% in all the categories except for  $GWP_{\text{BIOGENIC}}$  and  $GWP_{\text{LULUC}}$ . Referring to the biogenic carbon stored in the packaging, the negative impacts on  $GWP_{\text{BIOGENIC}}$  (**modules A3**) is balanced in the **modules A5**, where the packaging reach its end of life. A notable contribution in  $GWP_{\text{LULUC}}$  is due to the transportation modules (**module A2** and **module A4**).

An overview about the average contribution to the different modules considered in the system boundaries are shown in Table 12.

Table 12: Some environmental impacts of Mapepoxy L

ENVIRONMENTAL IMPACT	A1-A3	A4	A5	C1	C2	C3	C4	D	TOT
 <b>CLIMATE CHANGE (TOTAL)</b>	3,17E+00	7,45E-02	1,03E-01	1,56E-03	8,08E-03	1,78E-03	4,47E-03	-9,18E-03	<b>3,35E+00</b> kg CO <sub>2</sub> eq.
 <b>ACIDIFICATION</b>	1,05E-02	8,67E-05	2,87E-05	3,30E-06	9,63E-06	9,35E-06	3,20E-05	-1,10E-05	<b>1,06E-02</b> mol H <sup>+</sup> eq.
 <b>DEPLETION OF ABIOTIC RESOURCES (FOSSIL)</b>	6,38E+01	9,57E-01	1,11E-01	3,25E-02	1,04E-01	3,53E-02	6,00E-02	-1,67E-01	<b>6,49E+01</b> MJ
 <b>WATER USE</b>	1,32E+00	8,49E-04	5,30E-03	3,40E-04	9,19E-05	3,48E-04	4,95E-04	-7,97E-04	<b>1,33E+00</b> m <sup>3</sup> world eq.

More details about electrical mix used in this EPD is shown below:

	Data source	GWP-GHG	Unit
Residual electricity grid mix (NO) – 2022	AIB	0,636	kg CO <sub>2</sub> -eq/kWh

## 8. DATA QUALITY

Table 14: Data quality

Dataset & Geographical reference	Database (source)	Temporary reference
<b>A1; A3</b>		
Filler	Sphera Database	2022
Resin Component	Ecoinvent 3.9.1	2022
Reactive diluting agent	Sphera Database	2022
Amines	Ecoinvent 3.9.1	2022
Additives	Sphera Database; Ecoinvent 3.9.1	2022
Residual electricity grid mix (NO)	Sphera Database	2023
Packaging components (EU)	Sphera Database; Ecoinvent 3.9.1	2022
<b>A2</b>		
Truck, Euro 5, 27t payload (GLO)	Sphera Database	2022
Light train, gross tonne weight 500t / 363t payload (GLO)	Sphera Database	2022
Oceanic ship (27500 DWT – GLO)	Sphera Database	2022
Diesel for transport (EU)	Sphera Database	2019
Heavy Fuel Oil (EU)	Sphera Database	2019
Electricity grid mix (EU)	Sphera Database	2019
<b>A4</b>		
Truck, Euro 6, 27t payload (GLO)	Sphera Database	2022
Diesel for transport (EU)	Sphera Database	2019
<b>A5</b>		
Tap water from surface water	Sphera Database	2022
Commercial waste in municipal waste incineration plant	Sphera Database	2022
Inert matter on landfill	Sphera Database	2022
Electricity grid mix (EU)	Sphera database	2019
<b>C1-C4</b>		
Truck (EURO 6 - 9,3 ton payload – GLO)	Sphera Database	2022
Electricity grid mix (EU)	Sphera Database	2019
Diesel for transport (EU)	Sphera Database	2019
Construction waste dumping (EU)	Sphera Database	2022
Construction waste treatment (EU)	Sphera Database	2022

All data included in table above refer to a period between 2019 and 2022; the most relevant ones are specific from supplier, while the others (i.e. transport and minor contribution dataset), come from European and global databases.

All dataset are not more than 10 years old according to EN 15804 §6.3.8.2 “Data quality requirements”. The Quality level concerning datasets used in the EPD can be considered as “very good” or “good” according to Annex E of the EN 15804 (current version).

Primary data concern the year 2022 and represent the whole annual production.

## 9. REQUISITE EVIDENCE

### 9.1 Indication for the calculation of Module A4 (Transport from the factory to the jobsite)

In order to calculate the impact related to the transport of 1 kg of product from the factory gate (Sagstua) to the jobsite, you can use the following formula:

$$\text{Transport Impact} = EF \text{ (kg/DU)} * \text{distance (km)}$$

EF: Emission Factor; DU: declared Unit

Table 14: The EFs are related to 1 kg of product transported with truck EURO 5 and EURO 6

Impact Category	Unit	EF (EURO 5)	EF (EURO 6)
<b>GWP<sub>TOTAL</sub></b>	(kg CO <sub>2</sub> eq.)/km	6,26E-05	6,15E-05
GWP <sub>FOSSIL</sub>	(kg CO <sub>2</sub> eq.)/km	5,92E-05	5,82E-05
GWP <sub>BIOGENIC</sub>	(kg CO <sub>2</sub> eq.)/km	2,78E-06	2,74E-06
GWP <sub>LULUC</sub>	(kg CO <sub>2</sub> eq.)/km	5,46E-07	5,37E-07
ODP	(kg CFC 11 eq.) /km	7,67E-18	7,55E-18
AP	(mol H+ eq.) /km	1,90E-07	7,15E-08
EP <sub>FRESHWATER</sub>	(kg P eq.) /km	2,16E-10	2,12E-10
EP <sub>MARINE</sub>	(kg N eq.) /km	8,62E-08	2,38E-08
EP <sub>TERRESTRIAL</sub>	(mol N eq.) /km	9,69E-07	2,87E-07
POCP	(kg NMVOC eq.) /km	1,72E-07	6,15E-08
ADP <sub>MINERALS&amp;METALS</sub>	(kg Sb eq.) /km	3,91E-12	3,85E-12
ADP <sub>FOSSIL</sub>	(MJ) /km	8,03E-04	7,90E-04
WDP	(m <sup>3</sup> world eq.) /km	7,12E-07	7,01E-07

Example:

If the product is transported from Sagstua (production plant) to Oslo (Jobsite) for around 90 km with a truck EURO 6, the GWP impact result will be:

$$GWP_{TOTAL} = 6,15E-05 \text{ kg CO}_2\text{eq. /km} * 90\text{km} = 5,54E-03 \text{ kg CO}_2\text{eq}$$

### 9.3 VOC emission

The product meets the criteria of the following voluntary labels:

- M1 (The Building Information Foundation RTS):  
license number 3666



## 10. VERIFICATION AND REGISTRATION

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

### CEN standard EN15804 served as the Core Product Category Rules (PCR)

PCR:	PCR 2019:14 Construction products (EN 15804:A2), Version 1.3.1, 2021-02-05, UN CPC code 54
PCR review was conducted by:	The Technical Committee of the International EPD® System. See <a href="http://www.environdec.com/TC">www.environdec.com/TC</a> for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat <a href="http://www.environdec.com/contact">www.environdec.com/contact</a> .
Independent third-party verification of the declaration and data, according to ISO 14025:2006:	<input checked="" type="checkbox"/> EPD Process Certification <input type="checkbox"/> EPD Verification
Third party verifier:	Certiquality S.r.l. Number of accreditations: 0008PRD rev.000
Accredited or approved by:	Accredia
Procedure for follow-up of data during EPD validity involves third-party verifier	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

## 11. REFERENCES

- EN 1504-9: PRODUCTS AND SYSTEMS FOR PROTECTING AND REPAIRING CONCRETE STRUCTURES. DEFINITIONS, REQUIREMENTS, QUALITY CONTROL AND CONFORMITY ASSESSMENT. GENERAL PRINCIPLES FOR THE USE AND APPLICATION OF SYSTEMS
- EN 1504-4: STRUCTURAL BONDING
- EN 15804: SUSTAINABILITY OF CONSTRUCTION WORKS - ENVIRONMENTAL PRODUCT DECLARATIONS - CORE RULES FOR THE PRODUCT CATEGORY OF CONSTRUCTION PRODUCTS
- EUROPEAN DIRECTIVE 2008/98/EC
- EUROPEAN RESIDUAL MIXES VERSION 1.0, 2023-06-01 (AIB: ASSOCIATION OF ISSUING BODIES)
- EUROSTAT - TREATMENT OF WASTE BY WASTE CATEGORY, HAZARDOUSNESS AND WASTE MANAGEMENT OPERATIONS
- GENERAL PROGRAMME INSTRUCTIONS OF THE INTERNATIONAL EPD® SYSTEM. VERSION 4.0
- ISO 14025 ENVIRONMENTAL LABELS AND DECLARATIONS - TYPE III ENVIRONMENTAL DECLARATIONS - PRINCIPLES AND PROCEDURES
- ISO 14044 ENVIRONMENTAL MANAGEMENT – LIFE CYCLE ASSESSMENT – REQUIREMENTS AND GUIDELINES
- PCR 2019:14 CONSTRUCTION PRODUCTS (EN 15804: A2), UN CPC CODE 54; VERSION 1.3.1

## CONTACT INFORMATION

EPD owner:



Mapei AS

<https://www.mapei.com/NO-NO/>

---

LCA author:



Mapei SpA

[www.mapei.it](http://www.mapei.it);  
Environmental Sustainability Office

---

Programme operator:



The International EPD® System

Address: EPD International AB  
Box 210 60  
SE-100 31 Stockholm  
Sweden

Website: [www.environdec.com](http://www.environdec.com)  
E-mail: [info@environdec.com](mailto:info@environdec.com)

---

**HEAD OFFICE**

**MAPEI SpA**

Via Cafiero, 22 - 20158 Milan

Tel. +39-02-37673.1

[mapei.com](http://mapei.com)

[mapei@mapei.it](mailto:mapei@mapei.it)





# ANNEX 1

## ANNEX 1: Self declaration from EPD owner

### Specific requirements

#### 1 Applied electricity data set used in the manufacturing phase

The electricity mix for the electricity used in manufacturing (A3) is the electricity grid mix

<0,636 kg CO<sub>2</sub> eq/MJ>

#### 2 Transport from the place of manufacture to a central warehouse

Transport distance, and CO<sub>2</sub>-eqv./DU from transport of the product from factory gate to central warehouse in Oslo shall be given. The following table shall be included in the EPD:

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy use	Unit	Value (l/t)	kg CO <sub>2</sub> -eqv./DU
Boat							
Truck	<85>	<Truck 27 tonn, EURO6>	<95>	<0,0199>	l/tkm	<1,89>	5,45E-03
Railway							
Rail							
Air							
Total	<85>	<Truck 27 tonn, EURO6>	<95>	<0,0199>	l/tkm	<1,89>	5,45E-03

### 3 Impact on the indoor environment

- Indoor air emission testing has been performed; specify test method and reference;  
M1 (license number 3666)\_\_\_\_\_
- No test has being performed
- Not relevant; specify \_\_\_\_\_